

Photoelectrics, Fibre Optic Sensor Plastic Fibres Type PD 60 CNX 20 BP .. T

CARLO GAVAZZI



- Range: Fibre dependent
 - Diffuse Reflective typ. 80 mm
 - Through Beam typ. 200 mm
- Teach-In (keyboard or remote setup)
- Keyboard set-up and multifunction LED
- Keyboard lock
- Microprocessor controlled and EEPROM parameter storage
- Operational voltage 10 - 30 V DC
- Output 100 mA, NPN and PNP
- Light or dark switching selectable
- Cable or M8 standard plug
- IP65 protection
- Timer: ON-delay or OFF-delay
- cUL and CE approved

Product Description

The PD60CNX20BP.. T is a fibre optic amplifier made specific for plastic fibres. The sensor is microprocessor based and has a buildin programmable functions such as Teach-In function for fast sensing distance optimising, NO or NC output, Time delay On or OFF. The sensor output is build as a Push-pull output that performs both a NPN and PNP output which are fully protected against short-cir-

cuit, transients and wrong polarity. The sensor is build in a strong 13 x 30 x 60 mm polycarbonate housing for DIN-rail mounting. The sensors are suitable for applications that require little space and high accuracy such as: Small part detection, tight locations, checking parts, counting, precise part positioning, material handling and assembly and robotics

Ordering Key

PD 60 CNX 20 BP M5 T

Type	_____
Housing style	_____
Housing size	_____
Housing material	_____
Not Used	_____
Plastic fibres	_____
Sensing distance cm	_____
Output type	_____
Output configuration	_____
Connection type	_____
Teach-In mode	_____

Type Selection

Housing W x H x D	Range S _n (Fibre dependent)	Ordering no. NPN and PNP cable Make or break switching	Ordering no. NPN and PNP plug Make or break switching
13 x 30 x 60 mm	80 mm diffuse mode 200 mm through beam mode	PD 60 CNX 20 BP T	PD 60 CNX 20 BP M5 T

Specifications

Rated operating distance (S_n) Diffuse mode Through beam mode	See optical fibre table Up to 80 mm Up to 200 mm	No load supply current (I_o)	≤ 40 mA
Sensitivity Teach-In Manual fine tune	Automatic threshold set-up Sensitivity increase or sen sitivity decrease	Voltage drop (U_d) I _L = 100 mA I _L = 10 mA	≤ 2 VDC ≤ 1 VDC
Temperature drift	< 0,4%/C°	Remote input ON OFF	≤ 1.4 VDC ≥ 3.0 VDC
Hysteresis (H) Differential travel	≤ 5%	Timer Range programmable First step Following step	0 to 5 sec. in 11 steps 40 mS 500 mS
Rated operational volt. (U_B)	10 to 30 VDC (ripple included)	Protection	Short-circuit, reverse pola- rity, transients
Ripple (U_{rip})	≤ 10%	Light source Light type Ambient light Incandescent light	GaAIAs, LED 660 nm Red modulated 10'000 Lux
Output current Continuous (I _a) Short-time (I)	100 mA 100 mA		




Specifications (cont.)



Sunlight	20'000 Lux	Temperature	
Operating frequency	1 KHz	Operating	0° to +60°C (32° to +140°F)
Response time		Storage	-20° to +80°C (-4° to +176°F)
OFF-ON (t_{ON})	$\leq 500 \mu\text{s}$	Vibration	10 to 150 Hz, 0.5 mm/7.5 g (IEC60068-2-6)
ON-OFF (t_{OFF})	$\leq 500 \mu\text{s}$	Shock	2 x 1 m & 100 x 0.5 m (IEC 60068-2-6, 60068-2-32)
Power ON delay (t_v)	$\leq 300 \text{ mS}$	Rated insulation voltage	50 VAC (rms)
Output function	Available (Push-pull output) Programming by keyboard	Housing material	
NPN and PNP		Body	Polycarbonate
Make or break		Connection	
Indication function	Target detected, timer ON, sensitivity, alignment, low signal, keyboard lock, short circuit	Cable	PVC, grey, 2 m, 4 x 0,25 mm ²
Environment		Plug	NPB, M8 x 1
Installation category	I (IEC 60664/60664A;60947-1)	Cables for plug (M5)	CONG5A-series
Pollution degree	3 (IEC 60664/60664A;60947-1)	Weight	24 g
Degree of protection	IP 65 (IEC 60529; 60947-1)	Approvals	cUL
		CE-marking	Yes

Operation Diagram

t_v = Power ON delay

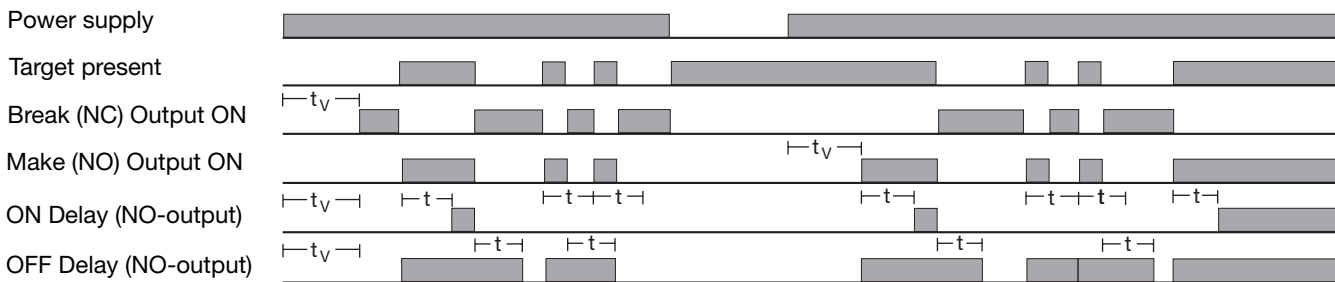


Dimensions

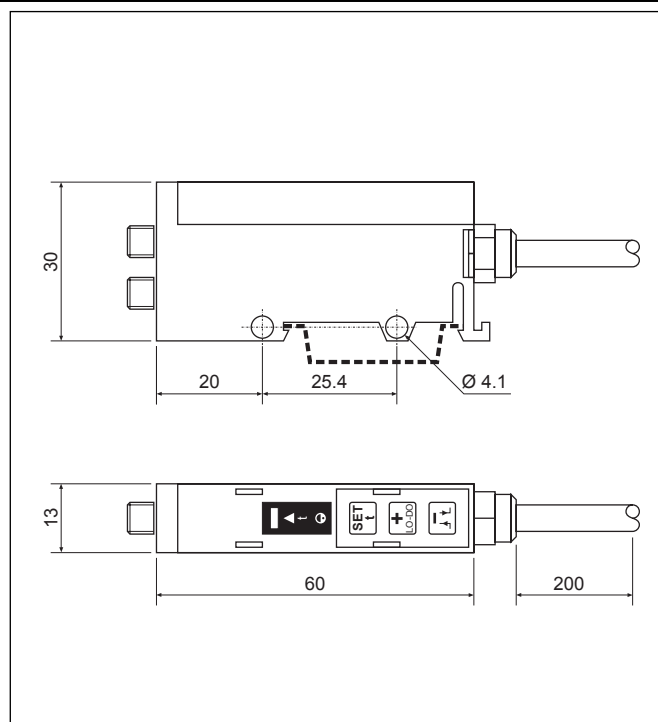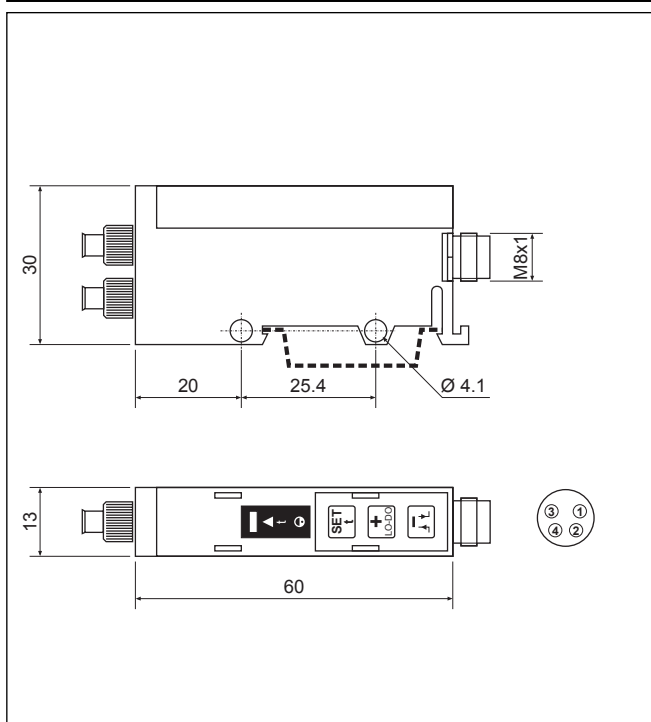


Programming Functions

Keyboard Unlock	Press & for 4 sec. and the indicator turn OFF	Timing functions ON delay Set timer (timer ON) Increase time (500 mS/step) Decrease time (500mS/step) ON or OFF delay (toggle) Reset timer (timer OFF) Exit timer setting	Press for 4 sec.
	Lock		Press & for 4 sec. and the indicator turn ON
Self-Teach operation Coarse set-up mode Fine set-up mode (Similar to Remote Input)	Press one time	Alignment help Enter alignment help Exit alignment help	Press for 4 sec.
	Press two times		Until the flashes Three frequencies proportional to the signal strength Press for 4 sec.
Sensitivity adjustment To increase To decrease	Press N time		
	Press N times		
Light or dark operation Change the output function	Press for 4 sec.		





Wiring Diagram

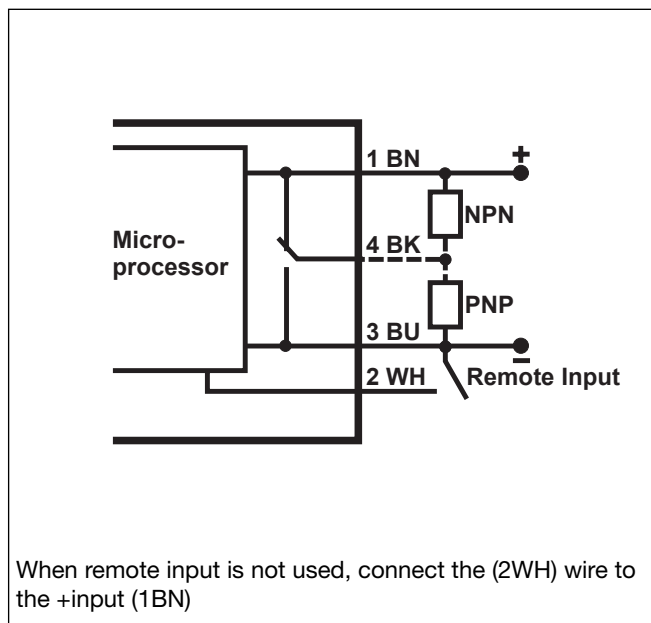

Keyboard and LED

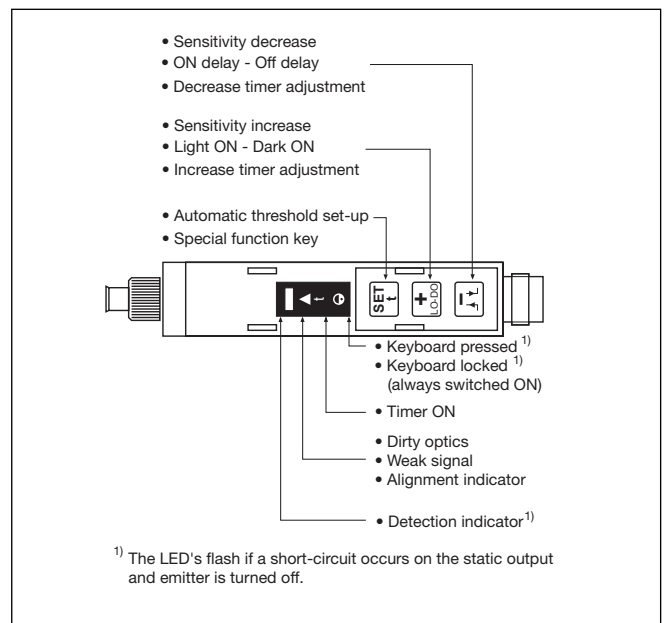

Installation Hints
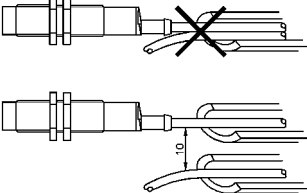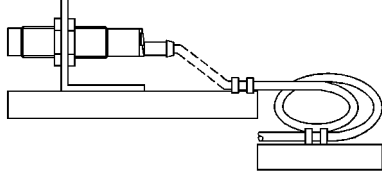
<p><i>To avoid interference from inductive voltage/current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables</i></p> 	<p><i>Relief of cable strain</i></p>  <p>The cable should not be pulled</p>	<p><i>Protection of the sensing face</i></p>  <p>A proximity switch should not serve as mechanical stop</p>	<p><i>Switch mounted on mobile carrier</i></p>  <p>Any repetitive flexing of the cable should be avoided</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Delivery Contents

- Photoelectric switch: PD60CNX20BP..T
- Installation instruction
- **Packaging:** Cardboard box

Accessories

- Plastic fibres type FPD.., FPT..
- Connector type: CONG5A..

For further information refer to “Accessories”