



Energy Management Control solution for solar PV applications Type Eos-Array Lite



- Modular local control system for PV plants
- Up to 16 DIN modules configuration equivalent to 280mm width
- Eos-ArrayLSoft freeware software for easy product configuration
- Eos-Array can be formed by maximum 16 units
- Eos-Array can manage in addition to VMU-ML master unit up to:
 - max 1 VMU-P unit;
 - max 15 VMU-S0 units;
 - max 1 VMU-O units.

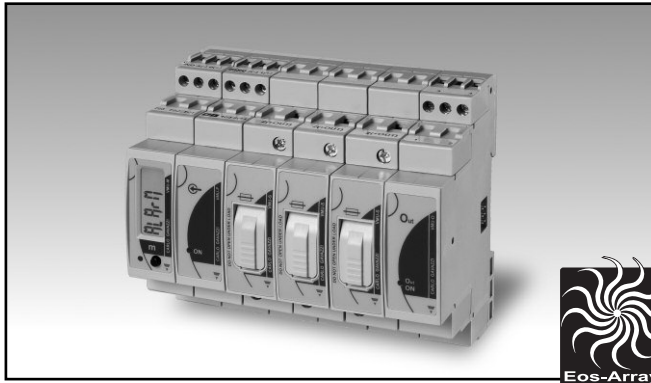

VMU-ML, master unit

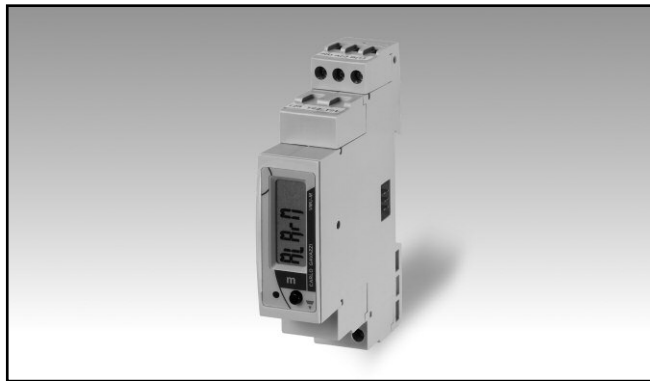


- Master communication capability
- RS485 communication port (Modbus)
- Local communication bus management up to 15 mixed VMU-S0, VMU-P and VMU-O units
- Single virtual or real alarm set-point connectable to any available variable
- Display readout: 6 DGTs
- 12 to 28 VDC power supply
- Dimensions: 1-DIN module
- Protection degree (front): IP40

Product Description

Eos-Array Lite is a combination of modules which performs mainly a current and voltage control of a photovoltaic plant. The core unit is VMU-ML which performs the local bus management of VMU-S0, VMU-P both measuring units and VMU-O output unit. VMU-ML assigns the proper local unit address

automatically (up to 15 units) and gathers all the local measurements coming from VMU-S0 and VMU-P measuring units. VMU-ML can provide by means of VMU-O modules one relay output so to manage up to 1 real alarm. Housing for DIN-rail mounting, IP40 (front) protection degree.

How to order **VMU-M L A S1 XX X**

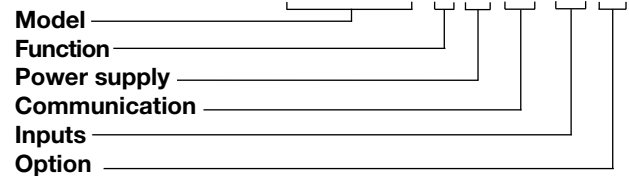

Type Selection

Function	Power supply	Communication	Inputs
L: Lite (*)	A: From 12 to 28VDC (*)	S1: RS485 Modbus (*)	XX: none (*)
Option	(*) as standard.		
X: none			



VMU-S0, string measuring unit




- Direct DC voltage measurement up to 1000V
- Direct DC current measurement up to 16A
- Instantaneous variables data format: 4 DGTs
- Instantaneous variables: V, A.
- Accuracy: ± 0.5 RDG (current/voltage)
- Auxiliary power supply from VMU-ML unit
- String alarm management by means of VMU-ML unit
- Integrated 10.3x38mm fuse holder for string protection
- Dimensions: 1-DIN module
- Protection degree (front): IP40

Product Description

Variables measuring unit with built-in protection fuse-holder (the fuse is not provided), particularly indicated for DC current, voltage, metering in PV solar applications. The current inputs/outputs and also the voltage inputs are made so to simplify the string com-

mon connections. Direct connection up to 16A. Moreover the unit is provided with an auxiliary serial communication bus. Alarms and serial communication are managed by means of VMU-ML module. Housing for DIN-rail mounting, IP40 (front) protection degree.

How to order **VMU-S0 AV10 X S FX**

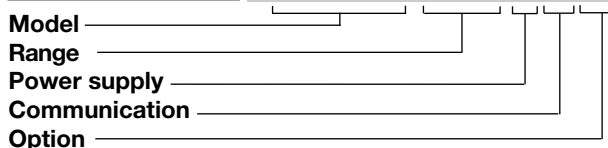

Type Selection

Range	Power supply	Communication	Option
AV10: 1000V DC, 16A (Direct connection) (*)	X: from 12 to 28VDC, self-power supply from VMU-ML unit	S: auxiliary communication bus, compatible only to VMU-ML module (*)	FX: with fuse holder (*)

(*) as standard.


VMU-P, environment variables unit



- Measurements: PV module temperature or air temperature, sun irradiation
- One temperature input: Pt100 or Pt1000 type
- One 120mV DC input with scaling capability for irradiation measurement
- Auxiliary communication bus to VMU-ML unit
- Auxiliary power supply from VMU-ML unit
- Dimensions: 1-DIN module
- Protection degree (front): IP40

Product Description

Environment variables measurement unit particularly indicated for PV module temperature or air temperature and sun irradiation, metering in PV solar applications. Moreover the unit is provided with a specific serial communication bus, which is managed by means of the additional VMU-ML module. Housing for DIN-rail mounting, IP40 (front) protection degree.

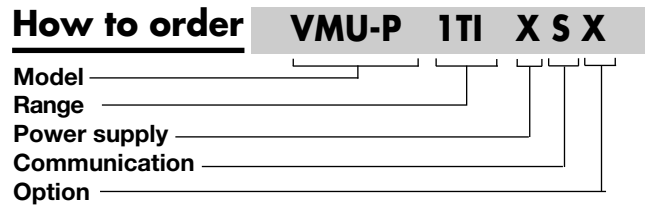


Type Selection

Range	Power supply	Communication	Option
1TI: One "Pt" temperature type probe, sun irradiation measuring inputs (*)	X: from 12 to 28VDC, self-power supply from VMU-ML unit	S: auxiliary communication bus, compatible only to VMU-ML module (*)	X: none

(*) as standard.



VMU-O, relay outputs unit

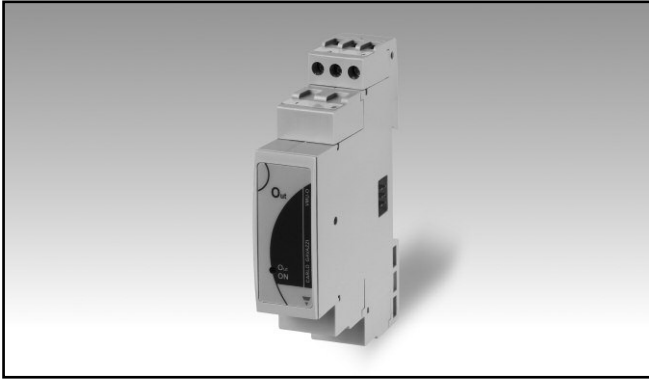

- One relay output managed by the VMU-ML module
- Auxiliary power supply from VMU-ML unit
- Dimensions: 1-DIN module
- Protection degree (front): IP40


VMU-O Product Description

Relay output unit suitable to be used in combination with VMU-ML module. VMU-O allows to add one relay output to a VMU-ML based

system so to manage local alarms. Housing for DIN-rail mounting, IP40 (front) protection degree.

How to order

VMU-O X XX R1 X

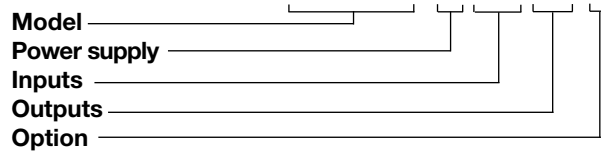

Type Selection

Power supply	Inputs	Outputs	Option
X: from 12 to 28VDC, self-power supply from VMU-ML unit (*)	XX: none	R1: one relay output (*)	X: none

(*) as standard.



VMU-ML Display and LED specifications

Display Type Information read-out	1 line (max: 6-DGT) LCD, h 7mm 4-DGT	Green blinking light: the communication on the RS485 bus is working. Red: alarm detected (any). In case of alarm/communication condition the LED alternates its colour from red (alarm) to green. The blinking time is approx. 1 second.
LED Type Status and colour	Dual colour Green steady light: the module is power supplied and there is no communication on the RS485 bus.	

VMU-P LED specifications

LED Type Status and colour	Multicolor Green: the power supply is ON.	White: the unit is enabled by VMU-ML module for data reading and displaying.
---	--	--

VMU-O LED specifications

LED Type Status and colour	Multicolor Green: the power supply is ON. White: the unit is enabled by VMU-ML module for data reading and displaying. Blue: digital output is activated. Cycling from one	colour to any other one: the unit shows the status of the module according to the colour list above. The cycling time is approx. 1 second.
---	--	--

VMU-ML input specifications

Key-pad	1 push-button for variable scrolling and for some parameters programming.	Full programming can be carried out only using Eos-ArrayLSoft.
----------------	---	--



VMU-S0 input specifications

Rated inputs		Input impedance	
Current type	1 (shunt)	Voltage	> 2.5MΩ
Current range	16A DC @ 40°C, 15A @ 50°C, 14A @ 55°C, 12A @ 60°C, 10A @ 65°C	Current	< 0.006Ω(+ fuse impedance) @ 0.5 Nm (screw terminal torque). The maximum dissipation power has not to exceed 2W.
Voltage	1000V DC	Voltage Overloads	
Accuracy	(@25°C ±5°C, R.H. ≤60%)	Continuous	1100V
Current	±(0.5%RDG+2 DGT) from 0.05A to 16A	For 500ms	1600V
Voltage	±(0.5%RDG+2 DGT) from 20V to 1000V	To earth	800V
Start up current	0.05A	Current Overloads	
Start up voltage	10V	Continuous	16A
Temperature drift	≤200ppm/°C	For 1s	100A max
Measurement sampling time	2 sec.	Protection	
Variables format		Fuse holder	Integrated into the module
Instantaneous variables	4-DGT (A), 5-DGT (V)	Fuse size	10.3x38mm (IEC269-2-1)
Resolution	0.1V; 0.01A.	Fuse current	fuse NOT provided
Max. and Min. data format	See "Variables format"		

VMU-P input specifications

Temperature drift	≤200ppm/°C	(@25°C ±5°C, R.H. ≤60%)	±(0.2%RDG+1DGT)
Variables format		(Display + RS485)	0% to 25% FS;
Instantaneous variables	4 DGT (Temperature, solar irradiation)	Temperature drift	±(0.1%RDG+1DGT)
Resolution	0.1°C/0.1°F; 1W/m ² , 1W/ft ² ;	Scaling factor	25% to 120% FS.
Max. and Min. data format	See "Variables format"	Operating mode	±150ppm /°C
Temperature probe input		Decimal point position	Dual scale:
Number of inputs	1	Impedance	- Input: programmable range from 0 to 999.9 (mVDC)
Temperature probe	Pt100 or Pt1000	Overload	- Display: programmable range from 0.000 to 9.999 (kW/m ² , kW/ft ²)
Number of wires	Up to 3-wire connection	Continuous	Fixed.
Wire compensation	Up to 10Ω.		> 30KΩ
Accuracy			10VDC (measurement available up to 1V on both display and communication bus)
(@25°C ±5°C, R.H. ≤60%)	See table "Temperature input characteristics"		20VDC
(Display + RS485)	±150ppm /°C		See the table "Insulation between inputs and communication bus"
Temperature drift	Selectable °C or °F		
Engineering unit	See the table "Insulation between inputs and communication bus"		
Insulation			
Irradiation sensor inputs			
Number of inputs	1		
Range	0 to 120mVDC		
Accuracy			



VMU-P Temperature input characteristics

Probe	Range	Accuracy (@25°C ±5°C, R.H. ≤60%)	Min Indication	Max Indication
Pt100	-50°C to +200.0°C	±(0.5%RDG +5DGT)	-50.0	+200.0
Pt100	-58°F to +392°F	±(0.5%RDG +5DGT)	-58.0	+392.0
Pt1000	-50°C to +200.0°C	±(0.5%RDG +5DGT)	-50.0	+200.0
Pt1000	-58°F to +392°F	±(0.5%RDG +5DGT)	-58.0	+392.0

VMU-ML Output specifications

RS485		Auxiliary communication bus	
Type	Slave function Multidrop, bidirectional (static and dynamic variables)		This is the communication bus to the VMU-S0, VMU-P and VMU-O units where VMU-ML performs the master function in this network. VMU-ML unit can gather the following information from the bus: - All variables available on the bus; - Antitheft status; - PV reverse voltage and current polarity; - PV module status. The local address in the VMU-S0, VMU-P and VMU-O units is automatically assigned by VMU-ML master unit based on their positions. It can manage up to 15 different addresses (units). See the table “Insulation between inputs and outputs”
Connections	2-wire. Max. distance 1000m		
Addresses	247, selectable by means of the front push-button		
Protocol	MODBUS/JBUS (RTU)		
Data (bidirectional)			
Dynamic (reading only)	All variables, see “List of the variables that can be...”		
Static (writing only)	All the configuration parameters.		
Data format	1 start bit, 8 data bit, no parity, 1 stop bit		
Baud-rate	Selectable: 9600, 19200, 38400, 115200 bits/s Parity: none		
Driver input capability	1/5 unit load. Maximum 160 transceivers on the same bus.		
Special functions	None	Insulation	
Insulation	See the table “Insulation between inputs and outputs”		

VMU-O Output specifications

Maximum number of modules managed by every single VMU-ML module	Up to 1	Type	Relay, SPST type AC 1-5A @ 250VAC AC 15-1A @ 250VAC Available by means of VMU-O module only See the table “Insulation between inputs and outputs”
Digital output			
Number of outputs	1	Insulation	
Purpose	Alarm notification as a String alarm and other alarms (see “List of the variables that can be connected to...”)		

Insulation between inputs and outputs

Module		Any	VMU-ML		VMU-P		VMU-O	VMU-S0		
	Type of input/output	Local bus	DC Power supply	RS485	Temperature: Ch1	Solar irradiation	Relay outputs: Ch1	String input (V-)	String input (A+)	String output (A+)
Any	Local bus	-	0kV	0kV	0kV	0kV	4kV	4kV	4kV	4kV
VMU-ML	DC Power supply	0kV	-	0kV	0kV	0kV	4kV	4kV	4kV	4kV
	RS485	0kV	0kV	-	0kV	0kV	4kV	4kV	4kV	4kV
VMU-P	Temperature: Ch1	0kV	0kV	0kV	-	0kV	4kV	4kV	4kV	4kV
	Solar irradiation	0kV	0kV	0kV	0kV	-	4kV	4kV	4kV	4kV
VMU-O	Relay outputs: Ch1	4kV	4kV	4kV	4kV	4kV	-	4kV	4kV	4kV
VMU-S0	String input (V-)	4kV	4kV	4kV	4kV	4kV	4kV	-	4kV	>5MΩ
	String input (A+)	4kV	4kV	4kV	4kV	4kV	4kV	4kV	-	4kV
	String output (A+)	4kV	4kV	4kV	4kV	4kV	4kV	>5MΩ	4kV	-

0kV	Inputs / outputs are not insulated. Use insulated probes and free of voltage contacts inputs.
4kVrms	EN61010-1, IEC60664-1 - Over-voltage category III, Pollution degree 2, double insulation on systems with max. 300Vrms to ground
4kVrms	IEC60664-1 - Using protection device with clamping voltage $\leq 4kV$ (surge suppressor) the system insulation can be considered as reinforced for string output voltage up to 1000V (800V to earth). IEC60664-1, IEC61730-2 application class B: impulse withstand voltage 1,2/50µsec: 6000V.
4kV	Only if the fuse is not present. Remove the fuse only when the disconnecting breaker is switched off. The fuse is only for over-current protection (it has not to be considered as a disconnecting device).

General specifications

Operating temperature	See table "String current vs. operating temperature".	Immunity to conducted disturbances	EN61000-4-6: 10V from 150KHz to 80MHz; EN61000-4-5: 500V on power supply; 4kV on string inputs.
Storage temperature	-30 to +70°C (-22°F to 158°F) (R.H. < 90% non-condensing @ 40°C)	Surge	
Over voltage category	Cat. III (IEC 60664, EN60664) For inputs from string: equivalent to Cat. I, reinforced insulation.	EMC (Emission) Radio frequency suppression	According to EN61000-6-3 According to CISPR 22
Insulation (for 1 minute)	See table "Insulation between inputs and outputs"	Standard compliance Safety	IEC60664, IEC61010-1 EN60664, EN61010-1
Dielectric strength	4000 VAC RMS for 1 minute	Approvals	CE, cULus Listed
Noise rejection CMRR	>65 dB, 45 to 65 Hz	Housing Dimensions (WxHxD) Material	17.5 x 90 x 67 mm Noryl, self-extinguishing: UL 94 V-0
EMC (Immunity) Electrostatic discharges	According to EN61000-6-2 EN61000-4-2: 8kV air discharge, 4kV contact;	Mounting	DIN-rail
Immunity to irradiated electromagnetic fields	EN61000-4-3: 10V/m from 80 to 3000MHz;	Protection degree Front Screw terminals	IP40 IP20
Immunity to Burst	EN61000-4-4: 4kV on power supply lines, 2kV on single lines;		

VMU-ML connections

Connections Cable cross-section area	Screw-type 1.5 mm ² max, Min./Max. screws tightening torque: 0.4 Nm / 0.8 Nm	Weight	2 screw terminals used for power supply
Screw terminal purposes 1.5 mm ²	3 screw terminals used for RS485 communication		Approx. 100 g (packing included)

VMU-S0 connections

Connections Cable cross-section area Current (+)	Screw-type Min. 2.5 mm ² , max 6 mm ² in case of flexible wire, Max. 10 mm ² in case of rigid wire. Min./Max. screws tightening torque: 0.5 Nm / 1.1 Nm	Screw terminal purposes 10 mm ² 1.5 mm ²	1+1 screw terminals: 1 (+) for string input and 1 (+) for string output (to the Inverter) 3 screw terminals: for negative connection of string
Voltage (-)	Max 1.5 mm ² , Min./Max. screws tightening torque: 0.4 Nm / 0.8 Nm	Weight	

VMU-P connections

Connections Cable cross-section area	Screw-type 1.5 mm ² max. Min./Max. screws tightening torque: 0.4 Nm / 0.8 Nm	Weight	2 screw terminals used for solar irradiation sensor
Screw terminal purposes 1.5 mm ²	3 screw terminals used for temperature probe		Approx. 100 g (packing included)

VMU-O connections

Connections Cable cross-section area	Screw-type Max 1.5 mm ² Min./Max. screws tightening torque: 0.4 Nm / 0.8 Nm	Screw terminal purposes 1.5 mm ²	2 screw terminals: for relay output (SPST type)
--	--	---	--

Power supply specifications

VMU-ML Power supply Power consumption	12 to 28 VDC ≤1W	VMU-S0-P-O Power supply Power consumption	Self-power supplied through the communica- tion bus ≤0.7W
--	---------------------	--	--

Sizing of Carlo Gavazzi DC power supply

VMU-S0 units	VMU-O units	VMU-P units	Consumption	Power supply part number
From 1 to 3	None	None	PS _w : 2.5W	SPM1 24 1 or SPD24051B
From 1 to 3	up to 1	up to 1	PS _w : 5W	SPM1 24 1 or SPD24051B
From 4 to 10	From 2 to 4	up to 1	PS _w : 10W	SPD24181B
From 11 to 14	up to 1	up to 1	PS _w : 10W	SPD24181B
Max. 14	Max. 7	Max. 1		

Note: the consumption above includes already one VMU-U unit. For different combinations not mentioned above the consumption calculation is the following: $PS_w < 1W + n_{VMU-S0} * 0.5W + n_{VMU-O} * 0.7W + n_{VMU-P} * 1.8W$. where "n" is number of power supplied units.

Variables format

No.	Module	Variable	Data format	Notes
1	VMU-S0	V	0.0 to 1250.0	
2	VMU-S0	A	0.0 to 50.0	
3	VMU-P	Temperature	-60 to 400.0	Temperature (°C/°F). The range is extended to cover both °C and °F indications
4	VMU-P	Solar irradiation (IRR)	0.0 to 9.999	Irradiation kW/m2 (kW/feet2) (e.g. in: 0 to 1kW/m2 (1kW/feet2), out: 0 to 100mV)

Alarm and diagnostics messages

No.	Message	Notes
1	StrinG	String failure warning: the “String control” function has detected a failure.
2	Conn.PY	Reverse string current or voltage
3	SYSteM	Power-up self-test error
4	buS	Auxiliary bus communication error
5	ALArM	Variables alarm (any)

String current vs. operating temperature

VMU-S AV10 Input current	VMU-O Max. contact current	Other modules	Operating temperature	
10A DC max.	2.5A	VMU-M, VMU-P	-25 to + 65°C	-13°F to 149°F
12A DC max.	3.0A	VMU-M, VMU-P	-25 to + 60°C	-13°F to 140°F
14A DC max.	3.5A	VMU-M, VMU-P	-25 to + 55°C	-13°F to 131°F
15A DC max.	4.0A	VMU-M, VMU-P	-25 to + 50°C	-13°F to 122°F
16A DC max.	5.0A	VMU-M, VMU-P	-25 to + 40°C	-13°F to 104°F

R.H. < 90% non condensing @ 40°C (104°F)




List of the variables that can be displayed and connected to ...

- RS485 communication port
- Real and virtual alarms and events



No	Variable	Event-logging	Data-logging	Alarm output	Module (from)	Notes
1	Error: 1	Yes	No	Yes (a)	VMU-ML	Local bus communication problems
2	Error: 2	Yes	No	Yes (a)	VMU-ML	Changed system modules configuration
3	Error: 3	Yes	No	Yes (a)	VMU-ML	Incoherent programming parameters
4	Error: 4	Yes	No	Yes (a)	VMU-ML	More than one VMU-P unit connected to the bus
5	Status: 1	Yes	No	No	VMU-ML	Local programming access
6	Status: 2	Yes	No	No	VMU-ML	Power ON/OFF
7	V	Yes	Yes	Yes	VMU-S0	Available from every string
8	A	Yes	Yes	Yes	VMU-S0	Available from every string
9	Status: 1	Yes	No	Yes	VMU-S0	Incoherent programming parameters
10	Status: 3	Yes	No	Yes	VMU-S0	Reverse string current or voltage
11	Status: 4	Yes	No	Yes	VMU-S0	High temperature inside VMU-S0 unit
12	String control	Yes	Yes	Yes	VMU-S0	
13	°C (°F) input	Yes	Yes	Yes	VMU-P	PV module temperature
14	kWp/m ² (kWp/ft ²)	Yes	Yes	Yes	VMU-P	Solar irradiation
15	Error: 1	Yes	No	Yes	VMU-P	Incoherent programming parameters
16	Error: 2	Yes	No	Yes (c)	VMU-P	Short circuit on probe input
17	Error: 3	Yes	No	Yes (c)	VMU-P	Open circuit on probe input
18	Status: input 1	Yes	No	No	VMU-O	ON /OFF status detection
19	Error: 1	Yes	No	Yes	VMU-O	Incoherent programming parameters

Note about “Alarm output”: YES (a), YES (b) and YES (c) are according to the relevant letter “OR” logic alarms.




VMU-ML connections

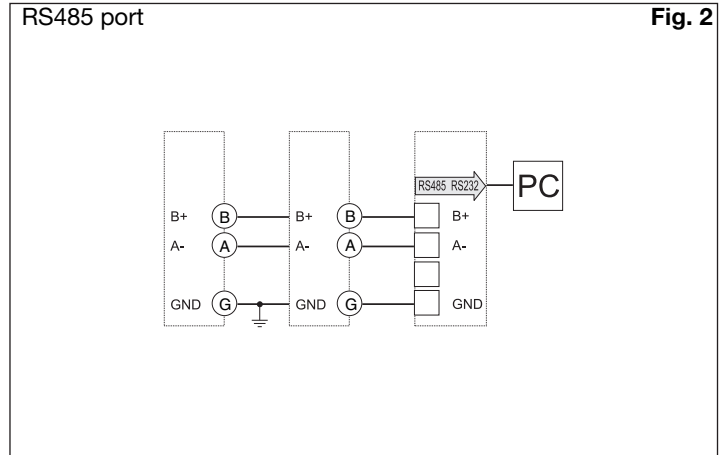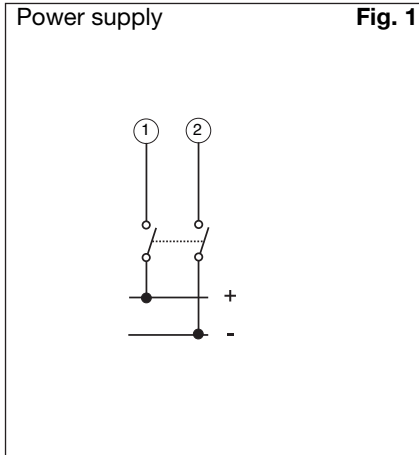


VMU-S0 connections

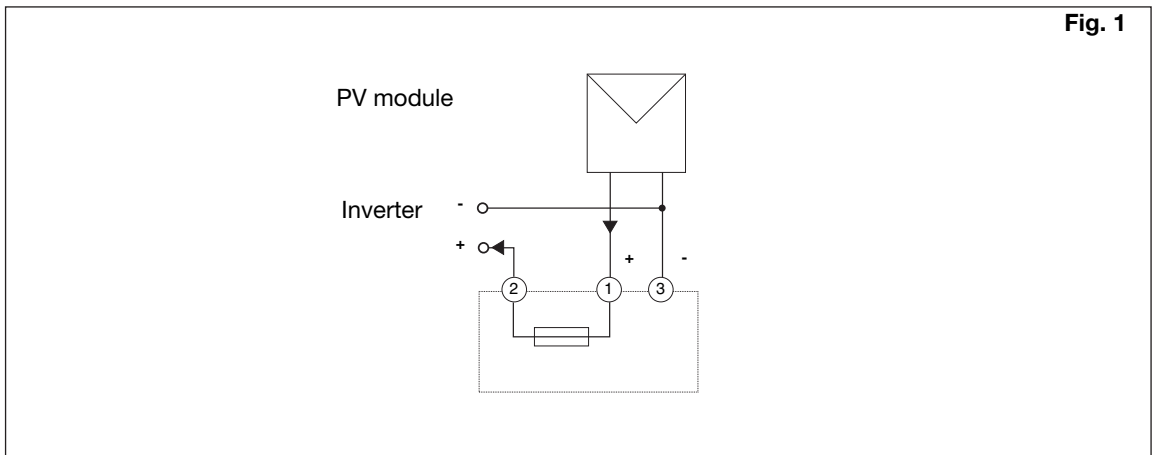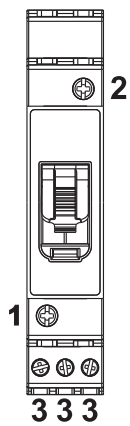


VMU-P connections

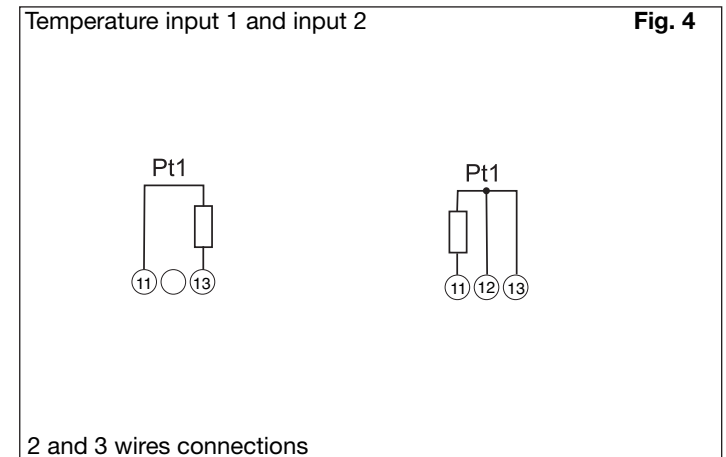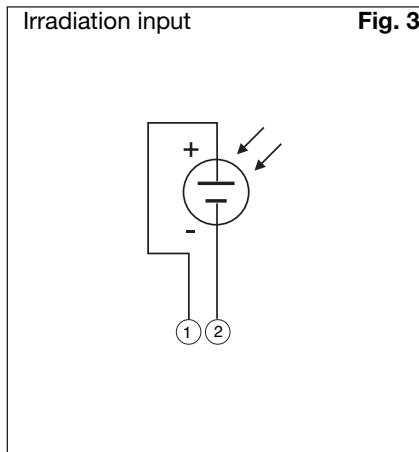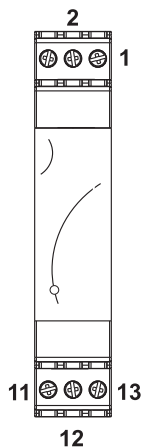

VMU-O connections

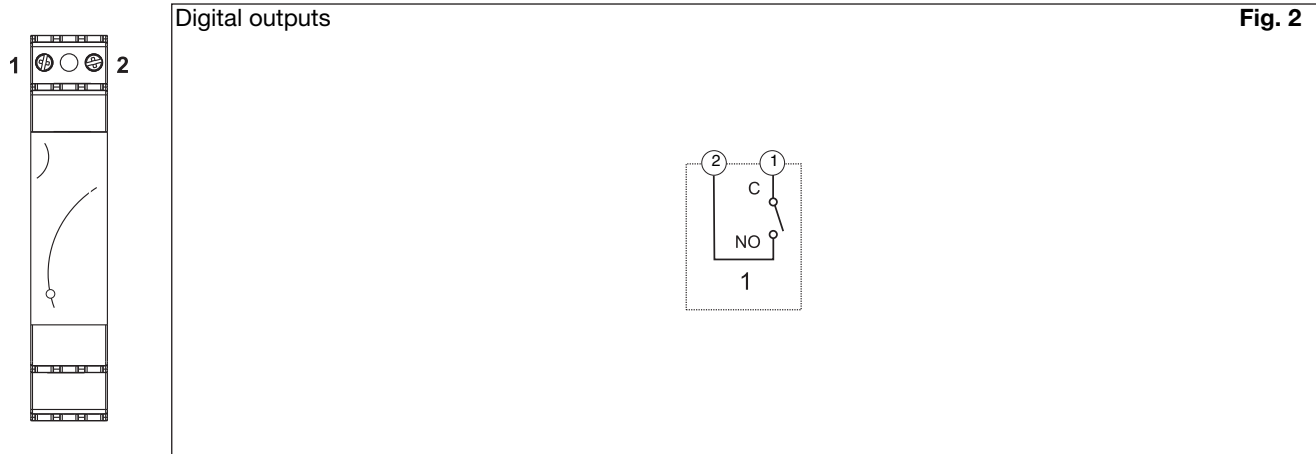

VMU-ML Front panel description

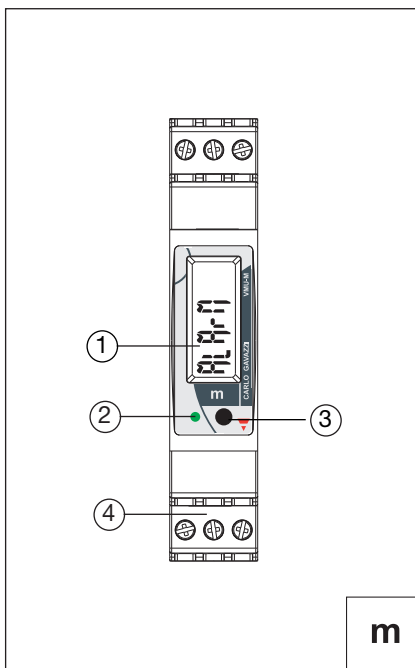

1. Display.

LCD-type with alphanumeric indications to:

- display some configuration parameters;
- display some measured variables.

2. LED.

Green steady light: the module is power supplied and there is no communication on the RS485 bus. Green blinking light: the communication on the RS485 bus is working. Red: alarm detected (any). In case of alarm/communication condition the LED alternates its colour from red (alarm) to green. The blinking time is approx. 1 second.


3. Push button.

To program the configuration parameters and to scroll the variables. One key function: short time pushbutton click: variable scroll or parameter increasing. Long time pushbutton click: programming procedure entering, parameter selection confirmation.

4. Screw terminals.


For power supply, bus and digital inputs/output connections

VMU-S0 Front panel description

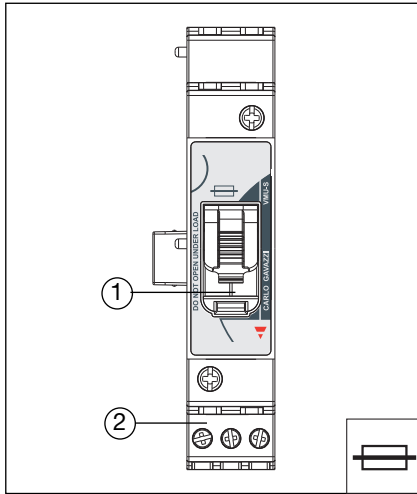


1. **Fuse holder cover**
For fuse holding and protection.
2. **Screw terminals**
For string connections

VMU-P Front panel description

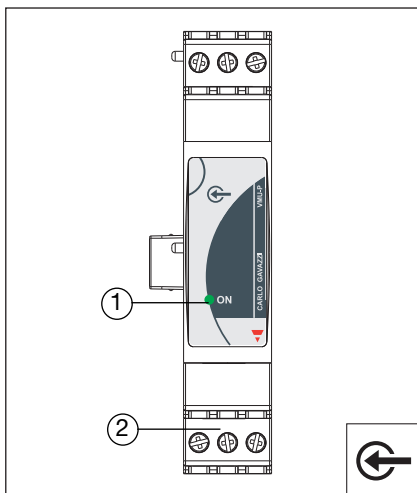


1. **LED**
ON steady light: the module is power supplied.
Green: the power supply is ON.
White: the unit is enabled by VMU-ML module for data reading and displaying
2. **Screw terminals**
For measuring input connections

VMU-O Front panel description

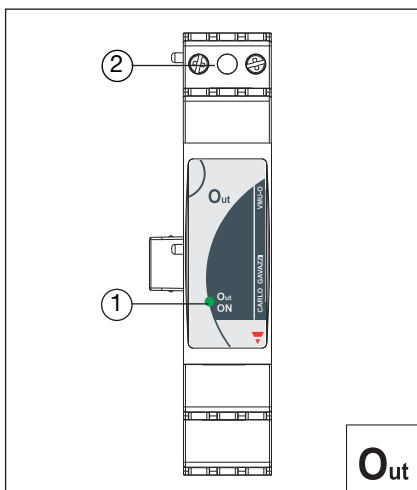


1. **LED**
Green: the power supply is ON
White: the unit is enabled by VMU-ML module for data reading and displaying.
Red: one or both digital inputs are activated
Blue: one or both digital outputs are activated
Cycling from one colour to any other one: the unit shows the status of the module according to the colour list above.
The cycling time is approx. 1 second.
2. **Screw terminals**
For digital inputs and outputs connections


VMU-ML Dimensions and panel cut-out

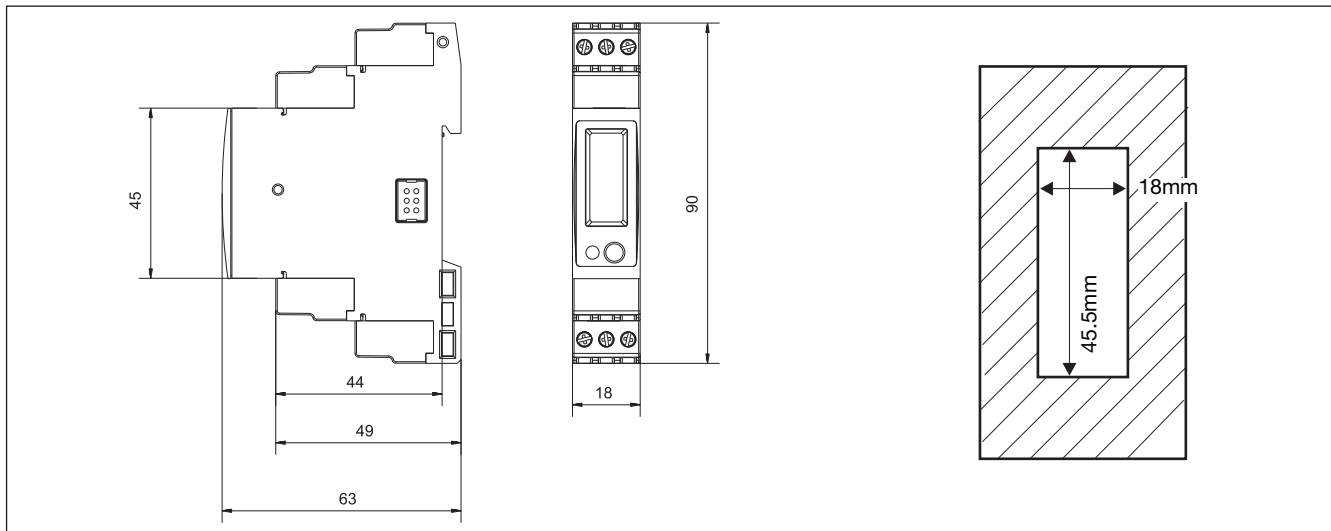


VMU-S0 Dimensions and panel cut-out

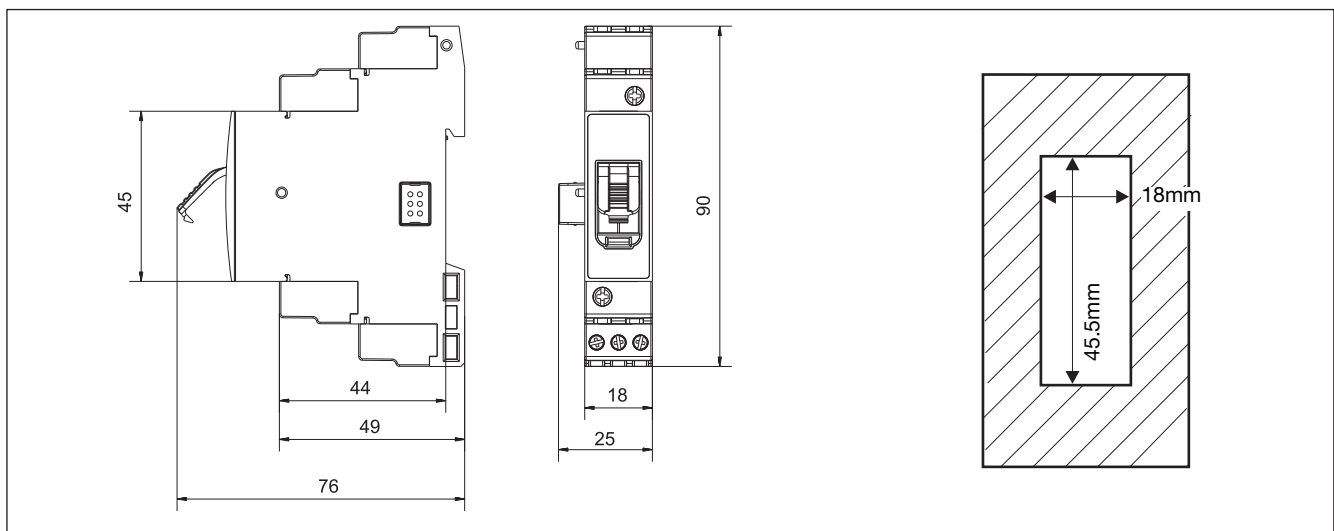

VMU-P Dimensions and panel cut-out

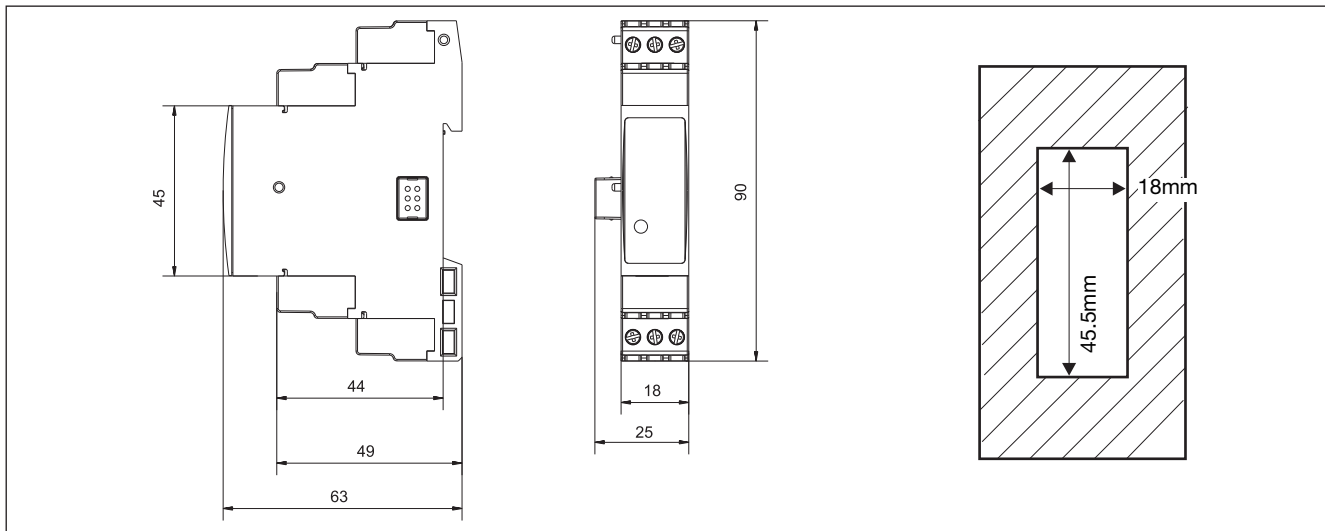

VMU-O Dimensions and panel cut-out

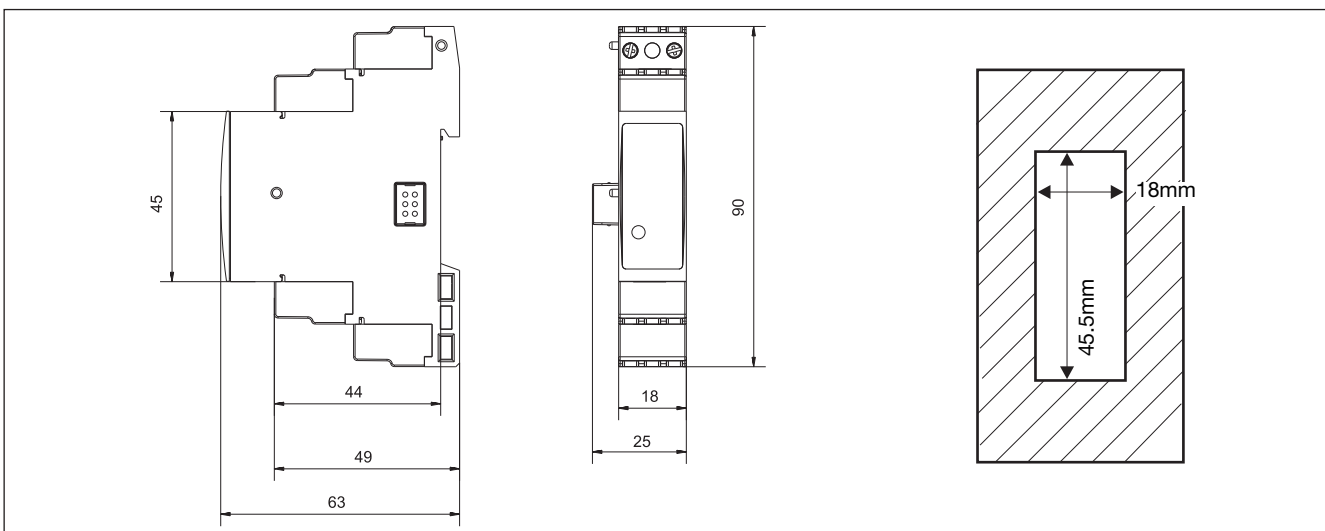

Mean time to failure (MTTF)

Model	MTTF/MTBF - Years	Test conditions	Standard
VMU-ML	24.2	gf, 50° C	MIL-HDBK-217F
VMU-S0	35.4	gf, 50° C	MIL-HDBK-217F
VMU-P	65.4	gf, 50° C	MIL-HDBK-217F
VMU-O	31.7	gf, 50° C	MIL-HDBK-217F

gf: ground, fixed.

Eos-ArrayLSoft parameter programming and variable reading software

<p>Eos-ArrayLSoft</p>	<p>Multi-language software (Italian, English, French, German, Spanish) for variable reading and parameters programming. The program runs under Windows XP/Vista</p> <p>One / three different applications can be selected:</p> <ul style="list-style-type: none"> - Solar: a management of a limited network where Eos-ArrayLSoft manages basically one VMU-ML unit with relevant VMU-S0, VMU-P and VMU-O modules and maybe an energy meter connected to the VMU-ML digital input; - Solar extended: a management of a complex network where Eos-ArrayLSoft manages many VMU-ML modules and relevant sub networks (VMU-S0, VMU-P and VMU-O units) and maybe an energy meter (EM21-72D, EM24-DIN, EM26-96) connected to the same RS485 bus. 	<p>Configuration mode</p>	<p>There are two configuration levels:</p> <ul style="list-style-type: none"> - the RS485 communication network which can include either one or more VMU-ML units; - the auxiliary network with all the parameters relevant to the following modules: VMU-ML, VMU-S0, VMU-P, VMU-O. <p>The following matrix are available:</p> <ul style="list-style-type: none"> - String 1: V-A - String 2: V-A - String n: V-A - Main: temperature, irradiation and AC energy. - Plant alarms and errors alarm - Relay output status.
<p>Application</p>		<p>Data displaying</p>	