

# Panel Actuators and Indicators

## Type PB

### Key Selector Switches



- Ø 22mm (Ø0.87") with Standard key
- Ø 30mm (Ø1.18") with Triangle key
- Two and three positions
- cULus and CE
- IEC/EN 60947-5-1, UL 508




### Product description

Key selector switches are mechanical switches that can be turned right, center or left to open or to close the electric contacts. Mostly used to switch between two/three circuits. When the key

is pulled-out no any other action can be done. They should be ordered in parts (operator + holder + contact block) and installed in an enclosure.

### Ordering key

**PB 22S KRS 31 KC**

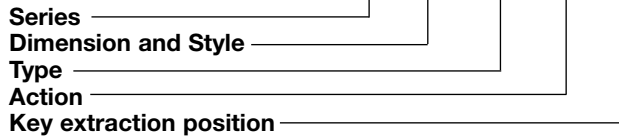

### Approvals



### Types

KRS = Key selector switch

### Dimensions and styles

22S = Ø22mm (Ø0.87") Standard style  
30F = Ø30mm (Ø1.18") Flush style

### Actions

21 = Two positions L R  
31 = Three positions L C R



### Key extraction position

KL = on the left position  
KC = on the center position  
KR = on the right position

### General data

Peripheral of actuator	AL
Actuator	Pa
Mechanical life	≥ 5 x 10 <sup>4</sup> cycles
Operating temperature	-25 to +70°C (-13 to +158°F)
Storage temperature	-30 to +80°C (-22 to +176°F)
Degree of protection	IP 65

### Dimensions - Push Buttons mm/inches

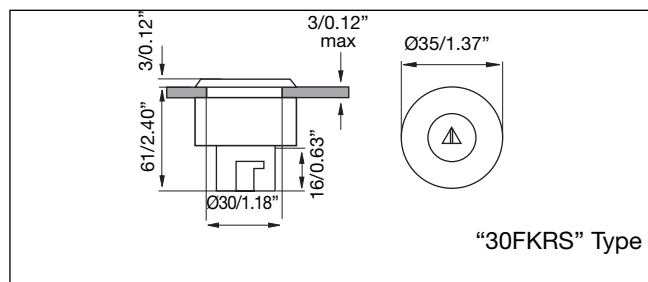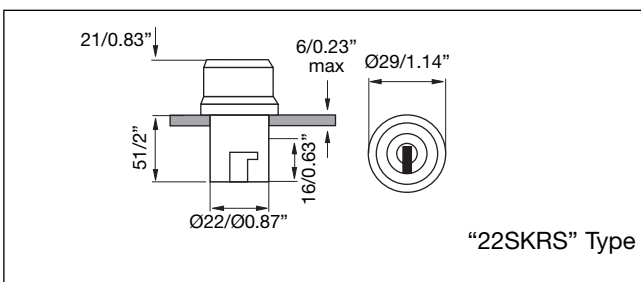

# Panel Actuators and Indicators

## Type PA2

### Contact Block

CARLO GAVAZZI



- High switching power
- Double switch
- Industrial applications
- 10A switching capacity
- Up to 500VAC
- Modular mounting (up to 3 elements)
- Screw terminals
- High reliability
- cULus and CE
- IEC/EN 60947-5-1, IEC/EN 60947-5-5, UL 508

### Product description

Switching element equipped with two independent elements. Available in different switching configurations. Pole and throw configurations can be single pole single throw (SPST) or double pole single throw (DPST). Elements can be snapped to each other on the bottom, up to 3.

### Ordering key

**PA 2 110 / 1**

Type \_\_\_\_\_  
 Number of contacts \_\_\_\_\_  
 Contact code \_\_\_\_\_  
 Options ( 1 = Snap action \_\_\_\_\_  
 2 = Slow action with forced opening (⊖) NC contact)

### Approvals



### Terminals

#### Screw terminals

Max. section single-core wire  
 Max. section stranded wire  
 Copper conductor wire  
 Terminal tightening torque

2 x 2.5mm<sup>2</sup> (0.004sq.inch)  
 2 x 1.5mm<sup>2</sup> (0.002sq.inch)  
 14 AWG  
 1.2Nm (10.6in.lb.)

### Technical data

Contact resistance	≤50mΩ
Travel	5.8 ± 0.2mm (2.28" ± 0.08")
Rated insulation Voltage U <sub>i</sub>	660VAC/DC (acc. to IEC 60947-5-1) 600VAC/DC (acc. to UL508)
Rated imp. withstand voltage U <sub>imp</sub>	2500VAC 50Hz 1min.
Minimum switching power	
Min Current	100mA
Min Voltage	24V
Switch housing	PC
Contact parts	Cu
Contact material	
Standard	Hard silver
Optional	Gold/silver
Optional for aggressive atmospheres	Silver/palladium
Operating temperature	-25 to +70°C (-13 to +158°F)
Storage temperature	-30 to +80°C (-22 to +176°F)


### Contact code

Contact configuration	Contact code
2 NO contacts (DPST)	200
2 NC contacts (DPST)	020
1 NC contact (SPST)	010
1 NO contact (SPST)	100
1 NC + 1 NO contacts (DPST)	110


### Contact characteristics

Contact Rating AC1	10A @ 250VAC		
Contact Rating	AC15	DC13	
(acc. to IEC 60947-5-1)			
@ 24V	10A	6A	
@ 110V	8A	1A	
@ 220V	6A	0.5A	
@ 380V	4A	-	
@ 500V	2.5A	-	
Thermal Contact Rating	10A (A600)	5A (B600)	
(acc. to UL 508)	2.5A (Q600/Q300)		
AC Contact Rating (acc. to UL 508)	A600	B600	
B600 (all snap codes)	@ 120V 6A	3A	
A600 (all slow codes)	@ 240V 3A	1.5A	
	@ 480V 1.5A	0.75A	
	@ 600V 1.2A	0.6A	
DC Contact Rating (acc. to UL 508)	Q600	Q300	
Q600 (all snap codes)	@ 125V 0.55A	0.55A	
Q600 (100, 200 slow codes)	@ 250V 0.27A	0.27A	
Q300 (010, 020, 110 slow codes)	@ 480V 0.10A	-	
	@ 600V 0.10A	-	


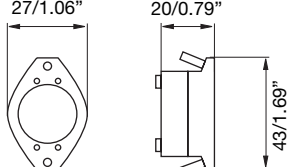

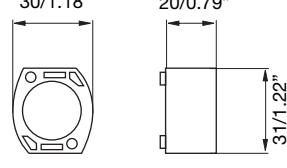

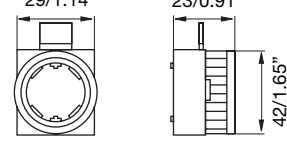
### Wiring diagram

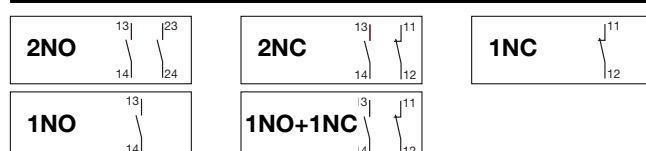

### Dimensions mm/inches

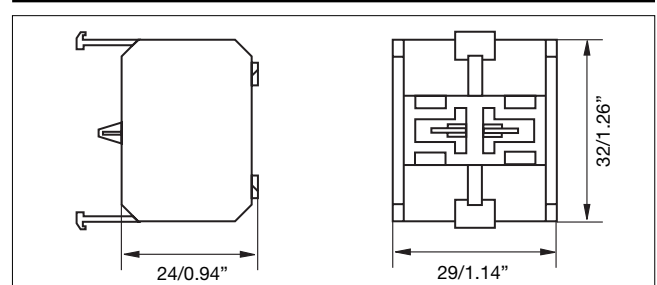


## Holders


	<b>Holder type "M"</b>	<b>Code</b> PB MB M  <b>Material</b> Zn + PBT	
	<b>Holder type "P"</b>	<b>Code</b> PB MB P  <b>Material</b> PBT	
	<b>Holder type "N"</b>	<b>Code</b> PB MB N  <b>Material</b> PC	

## Assembling and Mounting


It come easy to get a complete product. Just to choose the operator, the holder, the lamp element and the contact block (up to 3).

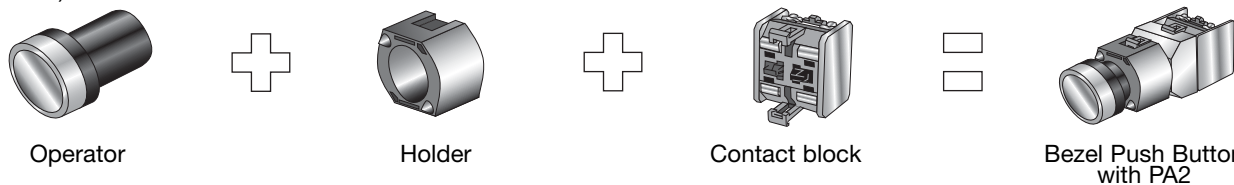


To install it, the only tool needed is a screwdriver. The same used to wiring the contact block can be used to fix the push-button.



The operator will be inserted into the panel.



The holder will be secured at the back by two screws or nut.



The contact block is snapped on.

## Accessories for Panel Actuators

	<b>Terminal shield</b> Installed behind the wiring screws of the contact block to avoid electric shock.	PC		<b>PA 2 SHIELD</b>
	<b>Mounting ring Ø22mm (0.87")</b> Installed on plastic panel to strengthen mounting.	FE		<b>PA MR 22</b>
	<b>Mounting ring Ø25mm (0.98")</b> When the mounting hole is Ø25mm (0.98"), it should be add to the panel.	FE		<b>PA MR 25</b>
	<b>Front bezel set Ø30mm (1.18")</b> For Ø30mm (1.18") panel hole, to have a thinner effect.	AL		<b>PA FBZL 30</b>
	<b>Label frame</b> Hang it on the push button or pilot light, for symbol or text explanation.	PC	10mm/0.39" 18mm/0.71"	<b>PA LBF 11</b> <b>PA LBF 18</b>
	<b>Yellow protection ring</b> To protect button and to prevent strike or mistaking operation.	ABS Rubber	Ø40mm/Ø1.57" Ø60mm/Ø2.36"	<b>PA YPR 4</b> <b>PA YPR 6</b>
	<b>Panel hole cap Ø22mm (0.87")</b> For blocking up prepared or useless holes on the panels.	ABS		<b>PA PHC 22</b>