

Dupline® Plug & Play Master Module

Interface for Schneider (Telemecanique & Modicon) PLC

Type G 3496 0007



- Schneider (Telemecanique & Modicon) Slave
- Plug and play: Automatic communication with specific PLC/Controllers
- Built-in normal Dupline® Channel Generator
- 128 I/O's and DC power supply on 3 wires
- RS485 port for interfacing to control system
- Split-I/O mode selectable (128 inputs and 128 outputs)
- LED-indications for supply, Dupline® carrier and Com-port TX
- Galvanically isolated Com-port supplied by internal DC/DC converter


Product Description

G 3495 0007 is designed as a cost-effective solution for interfacing Dupline® I/O's to all Schneider PLCs – the Telemecanique and Modicon families. It performs three

functions: Dupline® channel generator, power supply synchronization (enables 3-wire system with supply) and RS485 interface.

Ordering Key

G 3496 0007 700

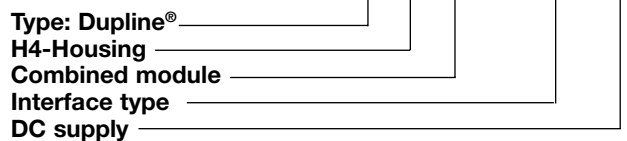

Type Selection

| Supply | PLC Interface Conformance | Ordering no. |
|-----------|---------------------------------------|-----------------|
| 20-30 VDC | Schneider, Telemecanique and Modicon. | G 3496 0007 700 |

Input/Output Specifications

| | |
|------------------------------|------------------------------|
| Power Output | |
| Output voltage | 20-30 VDC (pulsating) |
| Output current | < 3.0 A @ 50°C |
| Short circuit protection | 4 A quick acting fuse |
| Output voltage drop | < 1.0 V |
| Dupline® carrier | |
| Output voltage | 8.2 V (pulsating) |
| Current | < 60 mA |
| Short circuit protection | Yes |
| Scan time | |
| 128 channels | 132.2 ms |
| 64 channels | 69.8 ms |
| Communication Port | |
| Standard Connection | RS485 9 pole female Sub-D |
| Dielectric voltage | |
| Com-port-Dupline® | 1 kVAC (rms) |
| Protocol | Unitelway V2 |
| Channel Configuration in PLC | |
| Baud rate | 9600 |
| Data bits | 8 |
| Start bit | - |
| Stop bit | 1 |
| Parity | Odd |
| Flow-control | None |
| Pin assignment | |
| RS485 | |
| A | 8 |
| B | 3 |
| GND | 5 |

Supply Specifications

| | |
|--|---|
| Power supply | |
| Operational voltage (V _{in}) | Overvoltage cat. III (IEC 60664) 20-30 VDC |
| Reverse polarity protection | None |
| Current consumption | < 150 mA + Power load |
| Power dissipation | < 5 W |
| Transient protection voltage | 800 V |
| Dielectric voltage | |
| Supply – Dupline® | None |
| Supply – Com-port | 1 kVAC (rms) |

General Specifications

| | |
|----------------------------------|--------------------------------|
| Power ON delay | 2 s |
| Indication for | |
| Com-port TX | LED, red |
| Supply ON | LED, green |
| Dupline® carrier | LED, yellow |
| Environment | |
| Pollution degree | 2 (IEC 60664) |
| Operating temperature | 0° to +50°C (+32° to +122°F) |
| Storage temperature | -50° to +85°C (-58° to +185°F) |
| Humidity (non-condensing) | 20 to 80% |
| Mechanical resistance | |
| Shock | 15 G (11 ms) |
| Vibration | 2 G (6 to 55 Hz) |
| Dimensions | H4-Housing |
| Material | (See Technical Information) |
| Weight | 100 g |

Mode of Operation

The Dupline® Master Module (DMM) controls a 3-wire bus with signal, DC-power and common GND. The DMM is connected to a standard DC-supply, which it synchronizes with the Dupline® carrier signal before it is output to supply. The synchronization is necessary in order to enable the Dupline® and DC-supply to share the GND-wire.

The Dupline® Master Module is a Dupline® Channel Generator with the function of a master.

This means that the 128 Dupline® I/O's will be read/written by the DMM and then sent to the PLC.

The DMM can run in two different modes – Normal mode and split I/O mode. In Normal mode, Dupline® operates as a peer-to-peer system, where the channel generator automatically establishes a connection between Dupline® inputs and Dupline® outputs which are coded to the same Dupline® address. If e.g. an

input coded for B5 is activated, the output(s) coded for B5 will also be activated.

Consequently, a Dupline®-output can either be activated through the output-data received on DMM or by an active Dupline® input coded for the same Dupline®-address. In "Split I/O" mode, the channel generator treats the Dupline® inputs and Dupline® outputs independently. If e.g. an input coded for B5 is activated, the DMM

will make the information available for the PLC (like in normal mode), but it will not automatically activate the Dupline output(s) coded to B5. The Dupline® outputs are controlled exclusively through the output data received from the PLC. In this mode, up to 128 Dupline® inputs and 128 Dupline® outputs are available, since an input and an output coded to the same Dupline® address can operate independently.

Memory Mapping

Table of the memory mapping to the PLC


| Dupline® Channel | Schneider, Telemecanique & Modicon | | Dupline® Channel | Schneider, Telemecanique & Modicon | |
|------------------|------------------------------------|----------|------------------|------------------------------------|----------|
| | Read | Write | | Read | Write |
| A1 | MW0: X0 | MW8: X0 | E1 | MW2: X0 | MW10: X0 |
| A2 | MW0: X1 | MW8: X1 | F1 | MW2: X8 | MW10: X8 |
| A3 | MW0: X2 | MW8: X2 | G1 | MW3: X0 | MW11: X0 |
| A4 | MW0: X3 | MW8: X3 | H1 | MW3: X8 | MW11: X8 |
| A5 | MW0: X4 | MW8: X4 | I1 | MW4: X0 | MW12: X0 |
| A6 | MW0: X5 | MW8: X5 | J1 | MW4: X8 | MW12: X8 |
| A7 | MW0: X6 | MW8: X6 | K1 | MW5: X0 | MW13: X0 |
| A8 | MW0: X7 | MW8: X7 | L1 | MW5: X8 | MW13: X8 |
| B1 | MW0: X8 | MW8: X8 | M1 | MW6: X0 | MW14: X0 |
| B8 | MW0: X15 | MW8: X15 | N1 | MW6: X8 | MW14: X8 |
| C1 | MW1: X0 | MW9: X0 | O1 | MW7: X0 | MW15: X0 |
| D1 | MW1: X8 | MW9: X8 | P1 | MW7: X8 | MW15: X8 |

Dip-Switch Setting

- Sw.3** **On:** Communication on Datalink address 4 and 5
 Off: Communication on Datalink address 6 and 7
- Sw.4** **On:** Split I/O Channel Generator Mode
 Off: Normal Dupline® Monostable Channel Generator Mode
- Sw.5** **On:** 64 Dupline® channels
 Off: 128 Dupline® channels
- Sw.6** **On:** Maintain data to Dupline® receivers in case of communication failure
 Off: Clear data to Dupline® receivers in case of communication failure after 75 Dupline® scans

Pin Assignment

| DMM G34960007 | Schneider (Telemecanique & Modicon) |
|---------------|-------------------------------------|
| 9P D-SUB Male | 8-pin mini-DIN Male (TER or AUX) |
| 8 (A) | 2 (DA) |
| 3 (B) | 1 (DB) |
| 5 (GND) | 7 (GND) |

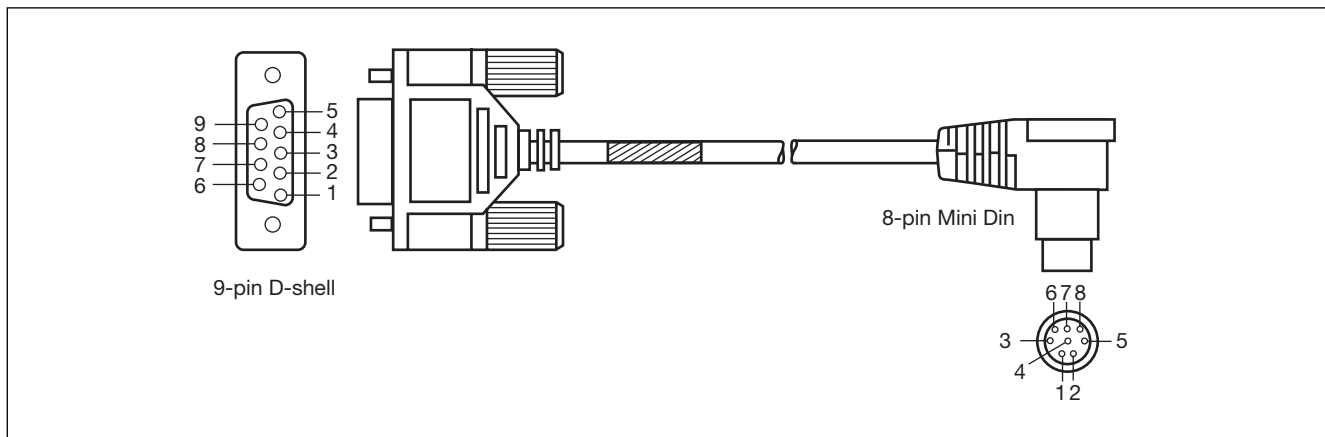

Accessories

Cable Sub-D 9M/8 mini Din

RS-232-SC1

Installation Hints

Slow-flashing TX-LED

Hardware fault

Check the wiring.

No Dupline® Carrier-LED

Dupline® short circuit

Short circuit between the two Dupline® wires.

Additional Information

Scope of supply
1 x Master Module

G3496 0007 700