
Proximity Magnetic Sensors Cylindrical Body, FMMP Series



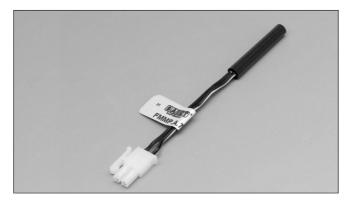

Product Description

The FMMP.A.7/S1 sensor is characterized by a cylindrical case with a 6 mm diameter. The switch contact is normally

open and has very high sensibility with very low hysteresis. The output connection is made with a 60 mm twin-lead cable.

•	Cylin	drical	case
---	-------	--------	------

- Plastic body
- Ø6 diameter
- NO output function
- High sensitivity contact
- · 60 mm twin-lead cable output connection

Ordering Key

FMMP.A.7

Type _____ OutputFunction _____ Reed Contact Type _____

General specification

Operating distances *	> 8 mm
Output function	NO
Case	Plastic
Protection degree	IP67
Operating temperature	-20 ÷ +75 °C
Output connection	Twin-lead cable


* The distances are measured at environmental temperature of 25°C with cylindrical 5x8 mm NeFeB magnet.

Electrical specifications

Max switching voltage	100 V
Max switching current contact	0,4 A
Max switching power contact	10 VA
Max Carry current	0,75 A



Dimensions



Wiring Diagrams

