
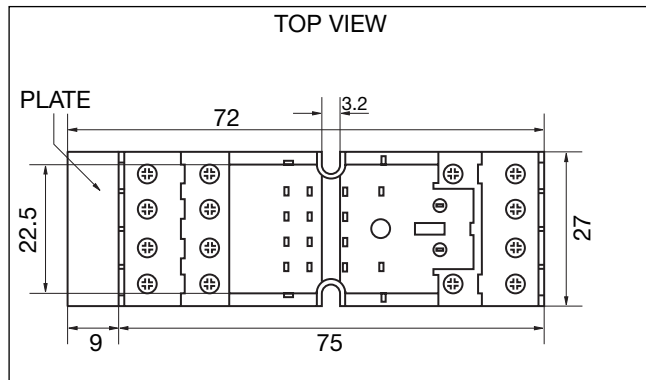
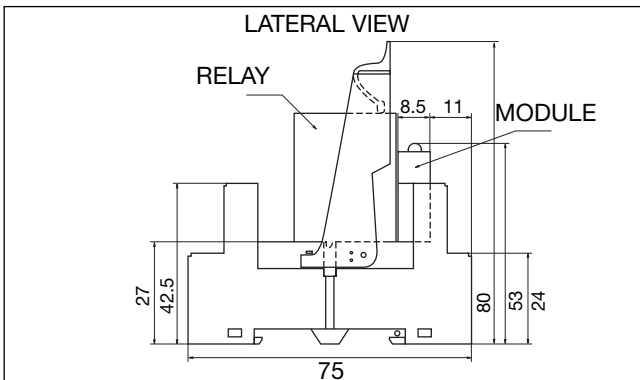
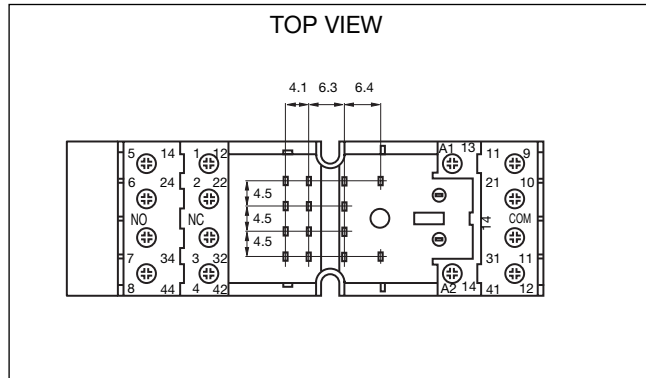


## Sockets for RMI Relays

### ZMI 15/2N and ZMI 15/4N

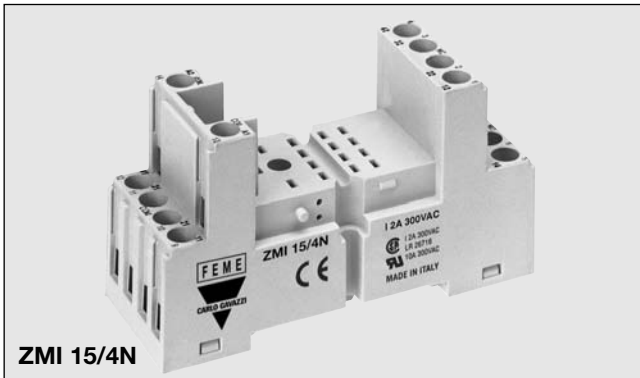

## Contact Characteristics

Plastic Material	PA6 +GF - V2
Contact Material	Cu Zn33
Contact surface	6µm tin plated
Terminals	8µm zinc plated steel
Screws	5µm nickel plated 8.8 steel
CSA Rating	12A 300VAC
UL Rating	12A 150VAC
UL Rating	10A 300VAC

Operating temp.	-40 to +85°C
Insulation voltage	>2.5kV
Creepage and Clearance	Gr.C250, VDE 0110b / 2.79
Maximum Screw torque	0.8Nm
Max Wire section	
Flex / compact wire	2 x 2.5mm <sup>2</sup> / AWG14
Cable End	2 x 1.5mm <sup>2</sup>
Terminal Protection degree	P20 (EN60529)
Approvals	CE, UL, CSA

Ordering code 2 contacts version for RMI 2 10 xxx :  
Ordering code 4 contacts version for RMI 4 5 xxx :

ZMI2N  
ZMI4N

Box content: 10 sockets, 10 labels  
Min Orderable Q.ty: 1box (10 pieces)  
Box size: W 145 x D 80 x H 95 Weight: 650g

## Optional Accessories (to be ordered separately if required)

Hold down spring	6.73.00.61.4
Metal Hold Down spring	6.73.0057.0
Labels	6.73.00.61.3
Modules	See related list page XXX

Min. Orderable Q.ty: 1 bag ( 10 pieces )  
Min. Orderable Q.ty: 1 bag ( 10 pieces )  
Min. Orderable Q.ty: 1 bag ( 20 pieces )