


Dupline® Field- and Installationbus Transmitter for Digital Signals Type G 3420 5501

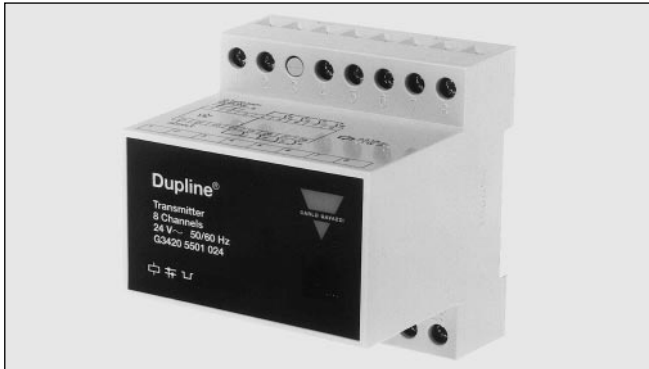


- 8-channel transmitter
- Optoisolated contact or NPN transistor inputs
- H4-housing
- For mounting on DIN-rail (EN 50022)
- LED-indications for supply, input activated and Dupline carrier
- AC or DC power supply
- Channel coding by GAP 1605

Product Description

Dupline transmitter for external supply. Detects the states of 8 volt free contacts and signals from devices with open collector NPN transistor output, e.g. inductive proximity switch EI ... N...

Ordering Key **G 3420 5501 024**

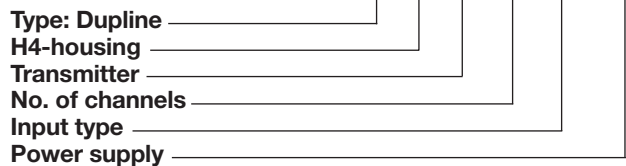

Type Selection

Supply	Ordering no. 8 channels Contact/NPN transistor
24 VAC 115 VAC 230 VAC	G 3420 5501 024 G 3420 5501 115 G 3420 5501 230
10 to 30 VDC	G 3420 5501 800

Input Specifications

Inputs	8 contacts or NPN transistors
AC version:	
Open loop voltage	7 VDC
Short-circuit current	3 mA
DC version:	
Open loop voltage	10 to 30 VDC
Short-circuit current	≤ 8 mA
Operating time for signal "1"	≤ 1 pulse train + 30 ms
Operating time for signal "0"	≤ 1 pulse train + 30 ms
Contact resistance	≤ 100 Ω
Cable length	≤ 25 m
Dielectric voltage	
Inputs - Dupline	≥ 200 VAC (rms)

Supply Specifications

Power supply AC types	Overvoltage cat. III (IEC 664)	Power supply DC types	Overvoltage cat. III (IEC 664)
Rated operational voltage through term. 21 & 22	230	Rated operational voltage	800
	230 VAC, ±15% (IEC 38)	Ripple	10 to 30 VDC (ripple included)
	115	Reverse-polarity protection	≤ 3 V
	115 VAC, ±15% (IEC 38)	Rated operational current	≤ 100 mA
	024	Inrush current	≤ 1 A
Frequency	45 to 65 Hz	Rated impulse withstand voltage	800 V
Voltage interruption	≤ 40 ms	Dielectric voltage	
Rated operational power	typ. 2.5 VA	Supply - Dupline	≥ 200 VAC (rms)
Rated impulse withstand voltage		Supply - Inputs	None
	230		
	4 kV		
	115		
	2.5 kV		
	024		
	800 V		
Dielectric voltage			
Supply - Dupline	≥ 4 kVAC (rms)		
Supply - Inputs	≥ 4 kVAC (rms)		



General Specifications

Power ON delay	typ. 2 s
Indication for	
Supply ON	LED, green
Input activated	LED, red
Dupline carrier	LED, yellow
Environment	
Degree of protection	IP 20
Pollution degree	3 (IEC 664)
Operating temperature	-20 to +50°C (-4 to +122°F)
Storage temperature	-50 to +85°C (-58 to +185°F)
Humidity (non-condensing)	20 to 80%
Mechanical resistance	
Shock	15 G (11 ms)
Vibration	2 G (6 to 55 Hz)
Dimensions	
Material	
(see Technical Information)	H4-Housing
Weight	250 g

Mode of Operation

8-channel transmitter with 8 inputs for contacts or NPN transistors. An external power supply is not required.

Each input may be coded individually by means of the code programmer GAP 1605. For details, please refer to the respective data sheet.

When a contact is used to short-circuit terminals 24 and 25 (input 1), the transmitter transmits on the channel coded for input 1.

When an NPN open collector transmitter between terminals 24 and 28 (input 4) pulls the input low (< +1 V), the transmitter transmits on the channel coded for input 4.

Whenever the contact of the input is opened, the transmitter stops transmitting on the respective channel.


Notes:

- Terminals 4 and 24 are internally connected.
- Terminals 4 and 24 are common (minus).

Input connections


- Input 1: terminals 24 & 25
- Input 2: terminals 24 & 26
- Input 3: terminals 24 & 27
- Input 4: terminals 24 & 28
- Input 5: terminals 4 & 5
- Input 6: terminals 4 & 6
- Input 7: terminals 4 & 7
- Input 8: terminals 4 & 8

Operation Diagram

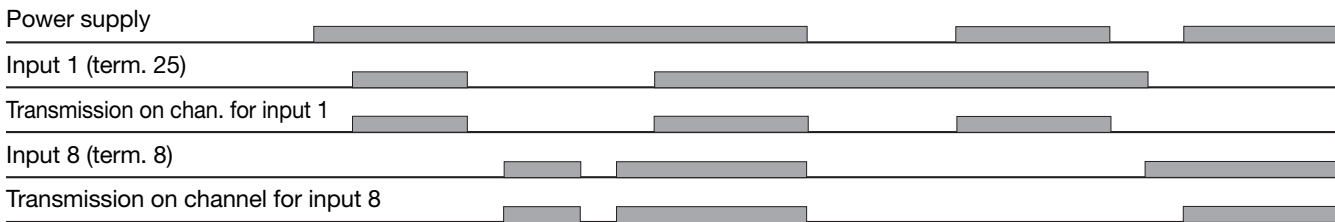


Wiring Diagrams

8 channels G 3420 5501 ...
Contact input

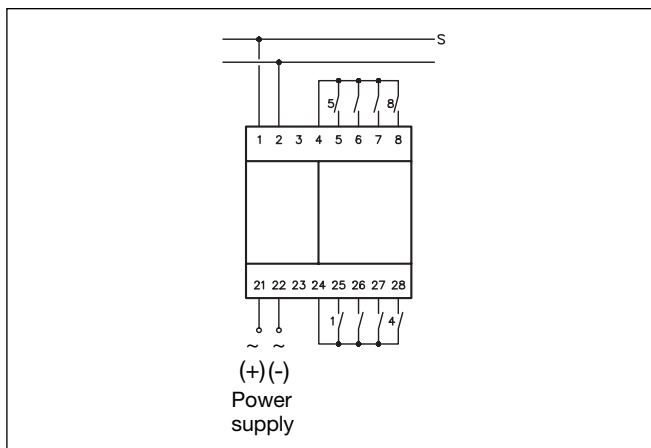

S: signal wire

8 channels G 3420 5501 ...
NPN transistor input

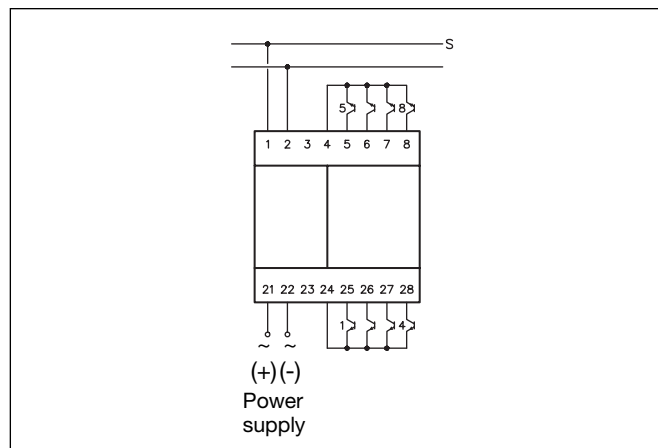

S: signal wire

Accessories

For further information, see "Accessories".