

Photoelectrics

Retro-reflective for Transparent Objects

Type PD30CNG02....MU



- Miniature sensor range
- Range: 2 m, with reflector
- Sensitivity adjustment by Teach-In programming
- Modulated, red light 617 nm
- Supply voltage: 10 to 30 VDC
- Output: 100 mA, NPN or PNP preset
- Make and break switching function programmable
- LED indication for output, stability and power ON
- Protection: reverse polarity, short circuit and transients
- Cable and plug versions
- Excellent EMC performance
- Mute function (sensor blanking)




Product Description

The PD30CNG02 sensor family comes in a compact 10 x 30 x 20 mm reinforced PMMA/ABS housing. The sensors are useful in applications where detection of transparent objects are needed. Compact housing and high power LED for excellent performance-size ratio.

The Teach-In function for adjustment of the sensitivity makes the sensors highly flexible. The output type is preset (NPN or PNP), and the output switching function is programmable (NO or NC). The mute function can be used for testing the sensor for: Malfunctioning, disconnection, optical axis adjustment, dusty and dirty lenses.

Ordering Key

PD30CNG02PPM5MU

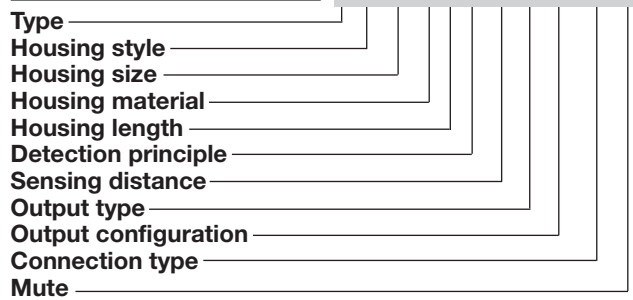

Type Selection

Housing W x H x D	Range S _n	Connection	Ordering no. NPN Make or break switching	Ordering no. PNP Make or break switching
10 x 30 x 20 mm	2 m	Cable	PD 30 CNG 02 NPMU	PD 30 CNG 02 PPMU
10 x 30 x 20 mm	2 m	Plug	PD 30 CNG 02 NPM5MU	PD 30 CNG 02 PPM5MU

Note: Reflectors to be ordered separately

Specifications

Rated operating distance (S_n)	Up to 2 m, with reflector Ø 80 mm (ER4)	Light source	inGaAlP, LED, 617 nm
Detection reliability	20% attenuation	Light type, not polarized	Red, modulated
Blind zone	10 mm	Sensing angle	± 2°
Sensitivity	Adjustable by Teach-In	Ambient light	10,000 lux
Temperature drift	≤ 0.1%/°C Teach settings are valid for teach temperature ± 20°C	Light spot	110 mm @ 1.5 m
Hysteresis (H) (differential travel)	≤ 10%	Operating frequency	1000 Hz
Rated operational volt. (U_B)	10 to 30 VDC (ripple included)	Response time	OFF-ON (t _{ON}) ON-OFF (t _{OFF})
Ripple (U_{rpp})	≤ 10%		≤ 0.5 ms ≤ 0.5 ms
Output current		Power ON delay (t_v)	≤ 300 ms
Continuous (I _a)	≤ 100 mA	Output function	NPN and PNP NO/NC switching function
Short-time (I)	≤ 100 mA (max. load capacity 100 nF)	Mute function	Preset Set up by button
No load supply current (I_o)	≤ 30 mA @ 24 VDC	Emitter off	0 to 3 sec
Minimum operational current (I_m)	0.5 mA	Operating mode	0 to 2.5 VDC (NPN) 5 to 30 VDC (PNP) Not connected
OFF-state current (I_r)	≤ 100 µA	Indication	Output ON Signal stability ON and power ON
Voltage drop (U_d)	≤ 2.4 VDC @ 100 mA		LED, yellow LED, green
Protection	Short-circuit, reverse polarity and transients	Environment	Installation category
			III (IEC 60664/60664A; 60947-1)




Specifications (cont.)


Pollution degree	3 (IEC 60664/60664A; 60947-1)	Rated insulation voltage	500 VAC (rms)
Degree of protection	IP 67 (IEC 60529; 60947-1)	Housing material	ABS
Ambient temperature		Body	PMMA, red
Operating	-25° to +55°C (-13° to +131°F)	Front material	
Storage	-40° to +70°C (-40° to +158°F)	Connection	
Vibration	10 to 55 Hz, 0.5 mm/7.5 g (IEC 60068-2-6)	Cable	PVC, black, 2 m 4 x 0.14 mm ² , Ø = 3.3 mm M8, 4-pin (CON, 54-series)
Shock	30 g / 11ms, 3 pos, 3 neg per axis (IEC 60068-2-6, 60068-2-32)	Plug	
		Weight	With cable: 40 g With plug: 10 g
		CE-marking	Yes
		Approvals	cULus (UL508)

Operation Diagram


tv = Power ON delay

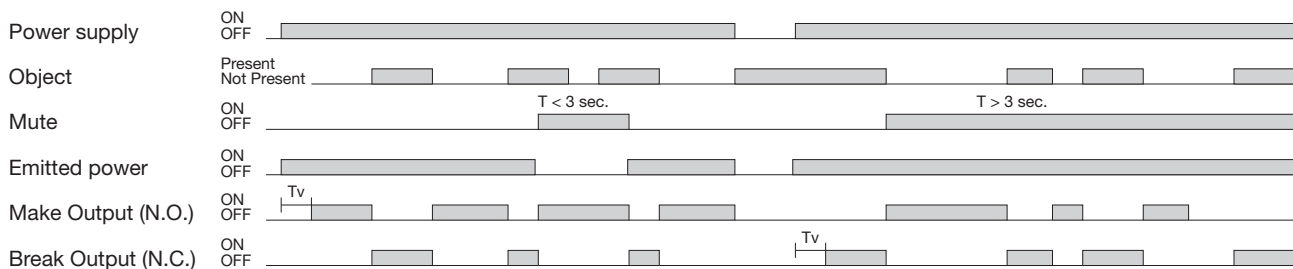


Wiring Diagrams

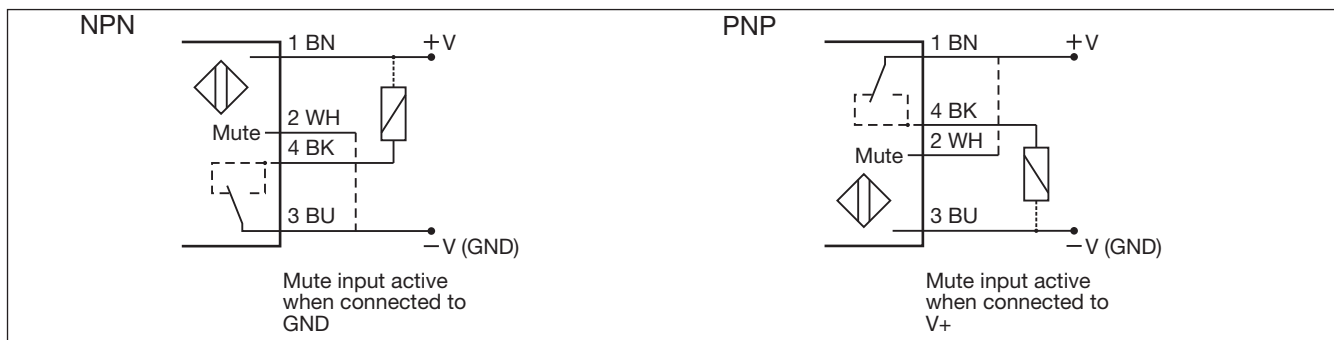


Detection Diagram

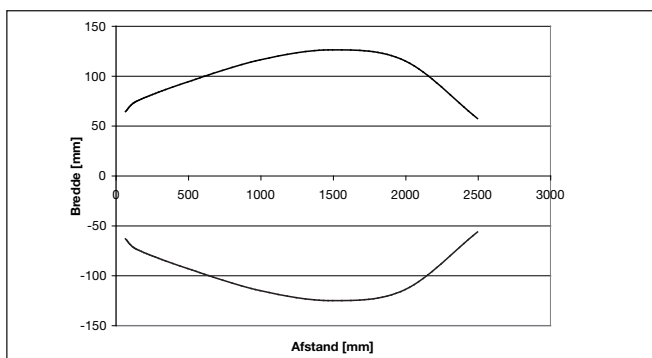


Excess Gain

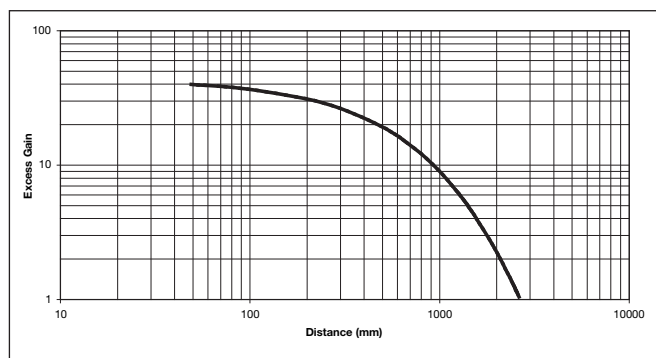


Signal Stability Indication

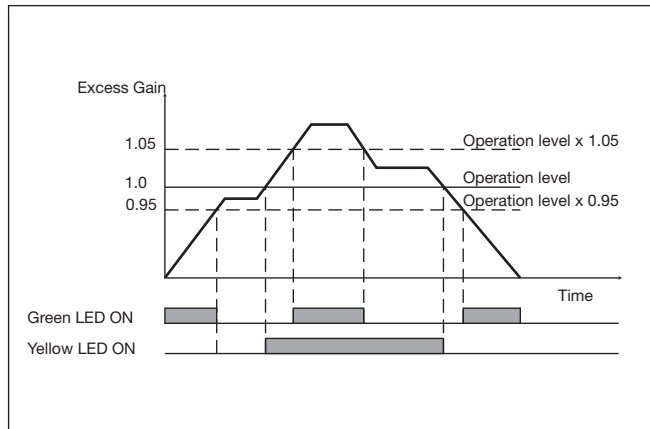

Accessories

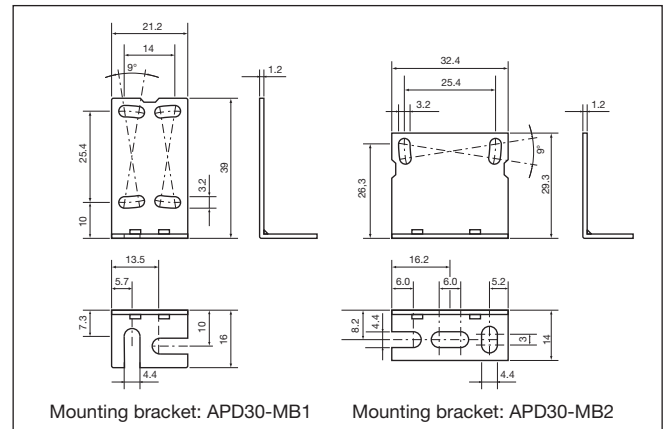

Dimensions

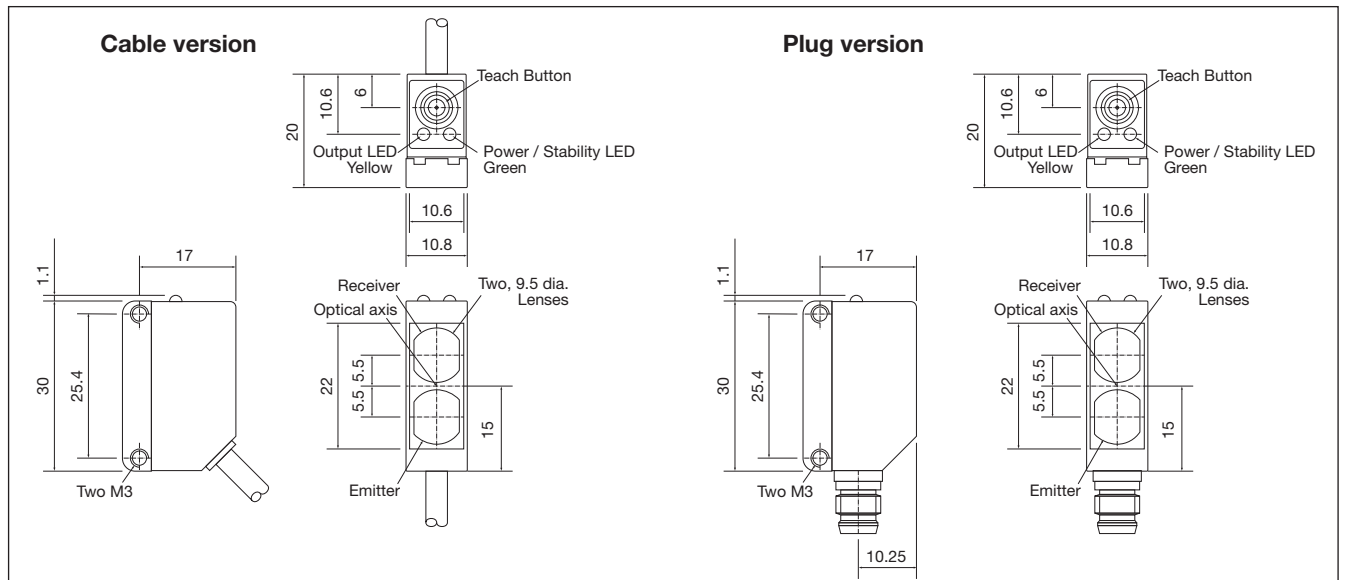

Installation Hints

<p>To avoid interference from inductive voltage / current peaks, separate the proximity switch cables from any other power cables. E.g. Engine, contactor or solenoid cables</p> <p>Incorrect Correct > 100 mm</p>	<p>Relief of the cable strain</p> <p>Incorrect Correct</p> <p>The cable should not be pulled</p>	<p>Protection of the sensing face</p> <p>Incorrect</p> <p>A proximity switch should not serve as mechanical stop</p>	<p>Sensor mounted on a mobile carrier</p> <p>Any repetitive flexing of the cable should be avoided</p>
---	--	--	--

Delivery Contents

- Photoelectric switch: PD 30 CNG 02 ...MU
- Installation instruction
- Mounting bracket APD30-MB1
- **Packaging:** Cardboard box


Accessories

- Mounting bracket APD30-MB2 to be purchased separately

Teach functions


Normal operation, optimized switching point

1. Line up the sensor with the reflector. Yellow LED and Green LED are ON.
2. Press the button for 3 seconds until both LEDs flashes simultaneously.
(The first switch point is stored)
3. Place the object between the sensor and reflector in the detection zone.
4. Press the button once and the sensor is ready to operate (Green LED ON, Yellow LED ON)
(The second switch point is stored)

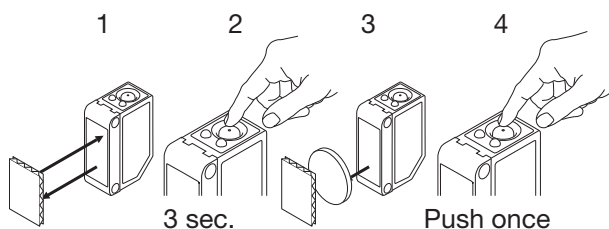


For make or break set-up (N.O. or N.C.)

1. Press the button for 10 seconds, until the green LEDs flashes.
2. While the green LED flashes, the output is inverted each time the button is pressed. Yellow LED indicates N.O. function selected.
If the button is not pressed within the next 10 seconds, the current output is stored.

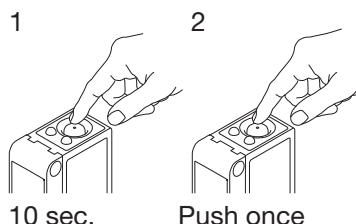

For maximum sensing distance (default setting)

1. Line up the sensor with the reflector, place a new transparent object between the sensor and reflector in the detection zone. Yellow LED is OFF and Green LED is ON.
2. Press the button for 3 seconds until both LEDs flashes simultaneously.
(The first switch point is stored)
3. Press the button a second time and the sensor is ready to operate (Green LED ON, Yellow LED ON)
(The second switch point is stored)

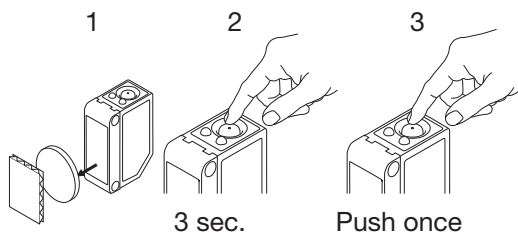

For the most transparent objects

1. Line up the sensor with the reflector. Yellow LED and Green LED are ON.
2. Press the button for 3 seconds until both LEDs flashes simultaneously.
(The first switch point is stored)
3. Press the button a second time and the sensor is ready to operate (Green LED ON, Yellow LED ON)
(The second switch point is stored)

